

WFM009-01 INSTRUCTION MANUAL

For 26-52" TV

If you have any questions along the way, just give us a call
1-800-460-0956 or mail to customerservice@x-mount.com.

We're ready to help!


⚠ CAUTION: PLEASE READ ENTIRE MANUAL PRIOR TO USE AND SAVE THESE INSTRUCTIONS.

Before getting started, let's check below lists to make sure it is just right for you!


<p>1</p> <p>Check your TV VESA is within Min and Max size</p>	<div> <div> <p>MAX:400mm/15.75" (MIN:75mm/2.95")</p> <p>75X75</p> <p>MAX:400mm/15.75" (MIN:75mm/2.95")</p> </div> <div> <p>No - This mount is NOT compatible.</p> <p>Yes - Perfect !</p> </div> </div>
<p>2</p> <p>Does your TV (including accessories) weigh MORE than 100 lbs. (45.5 kg)?</p>	<div> <div> <p>Max: 100LBS (45.5kg)</p> </div> <div> <p>No? Perfect – you may continue.</p> <p>Yes? This mount is NOT compatible.</p> </div> <div> <p>⚠ CAUTION: DO NOT exceed the maximum weight indicated. This mounting system is intended for use only with the maximum weights indicated. Use with products heavier than the maximum weights indicated may result in collapse of the mount and its accessories, causing possible injury.</p> </div> </div>
<p>3</p> <p>What is your wall made of?</p>	<div> <div> <p>Drywall with wood studs?</p> <p>Perfect!</p> </div> <div> <p>CAUTION: DO NOT install into drywall alone</p> </div> <div> <p>Solid concrete</p> <p>Perfect!</p> </div> <div> <p>? Unsure?</p> <p>Call Customer Service: 1-800-460-0956</p> </div> </div>
<p>4</p> <p>Do you have all the tools needed? (Not included)</p>	<div> <div> <p>Wood Stud Install</p> <p>Tape Measure Pencil Level Screw driver Electric Drill Socket Wrench 1/2"(13mm)</p> </div> <div> <p>Concrete Install</p> <p>Stud Finder Awl 5/32"(4mm) Wood Drill Bit 3/8"(10mm) Masonry Drill Bit Hammer</p> </div> </div>
<p>5</p> <p>Caution</p>	<ul style="list-style-type: none"> • This product is designed for use in wood stud, solid concrete walls - DO NOT install into drywall alone • The wall must be capable of supporting five times the weight of the TV and mount itself • Do not use this product for any purpose not explicitly specified by manufacturer • Manufacturer is not responsible for damage or injury caused by incorrect assembly or use

Product dimensions:


TV INTERFACE

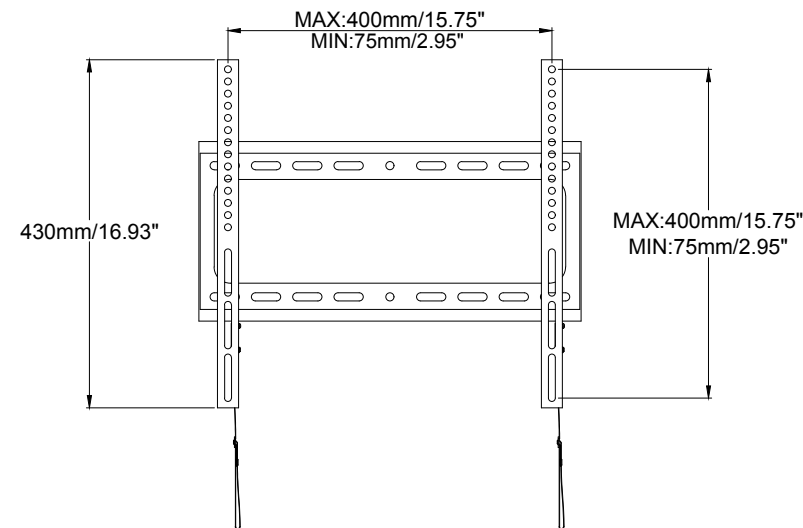


3-D

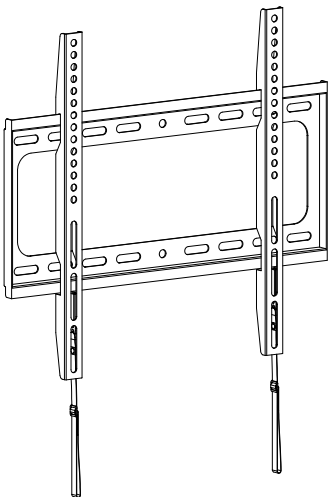

SIDE VIEW

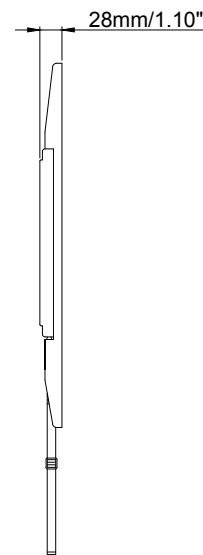

WALL PLATE

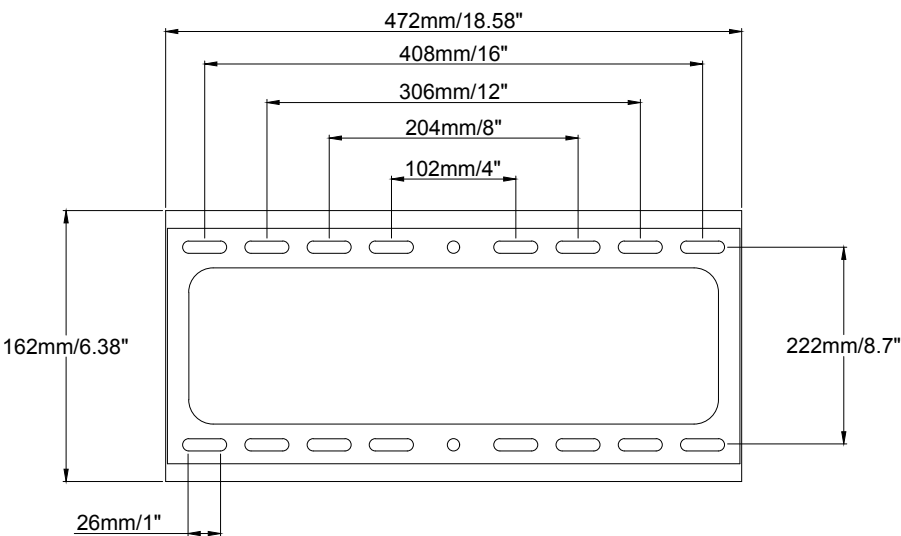


Parts and Hardware

⚠ WARNING: This product contains small items that could be a choking hazard if swallowed. Before starting assembly, verify all parts are included and undamaged. If any parts are missing or damaged, do not return the damaged item to your dealer; contact Customer Service.
Never use damaged parts!







📝 NOTE: Not all hardware included will be used.

Parts and Hardware for STEP 1





TV Brackets

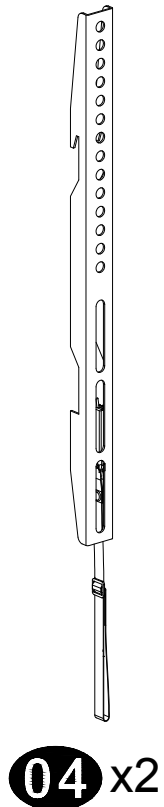



TV Screws

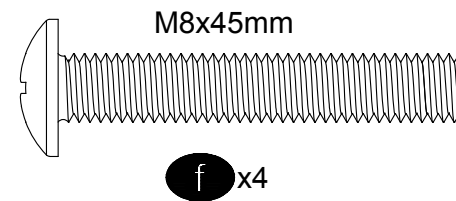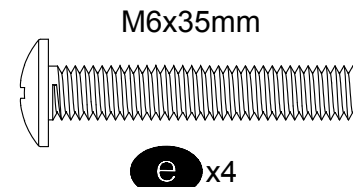

Spacers




Washers




Parts and Hardware for STEP 2


Wall Plate

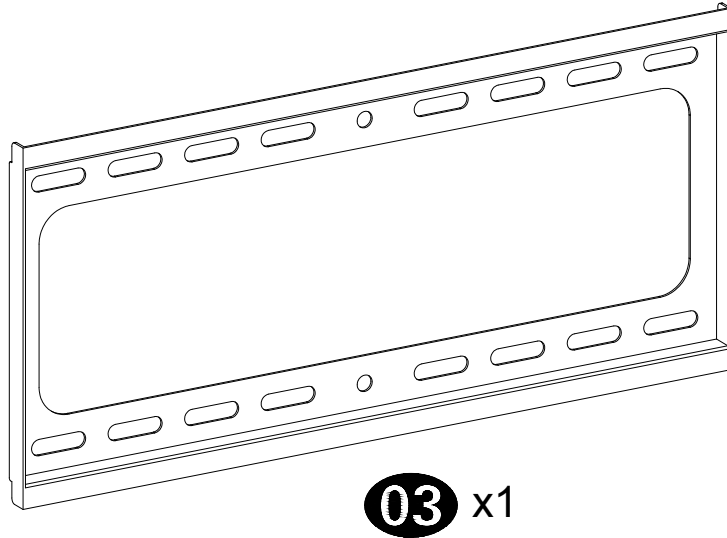


Lag Bolt

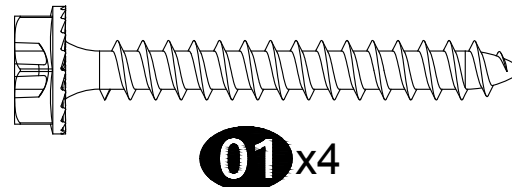

Allen Key

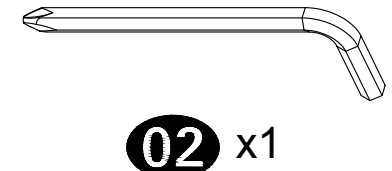

Concrete wall anchor (NOT INCLUDED)






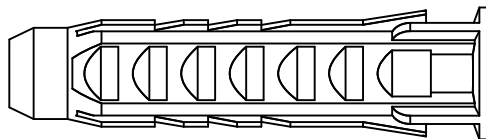


Concrete Wall Anchor
4pcs

Contact us at telephone 1-800-460-0956 (USA)
or mail to customerservice@x-mount.com. to have
these additional pieces shipped directly to you.


STEP 1 Attach Brackets to TV

1-1 Select TV Screws

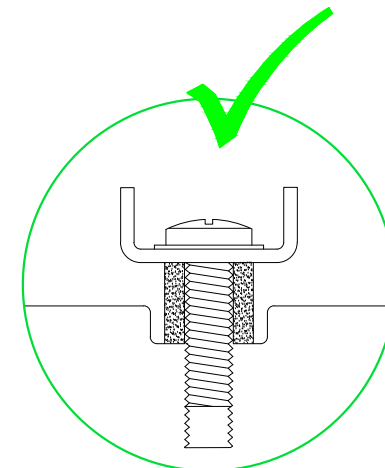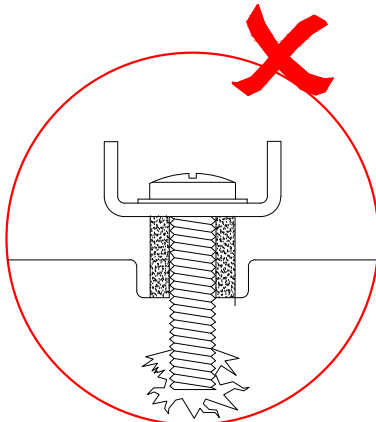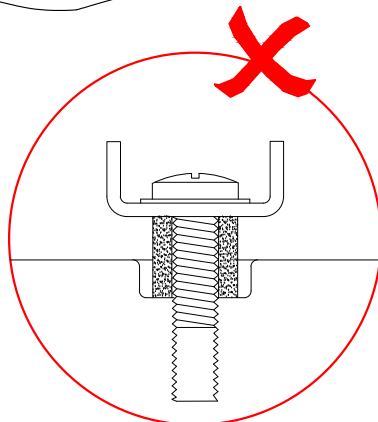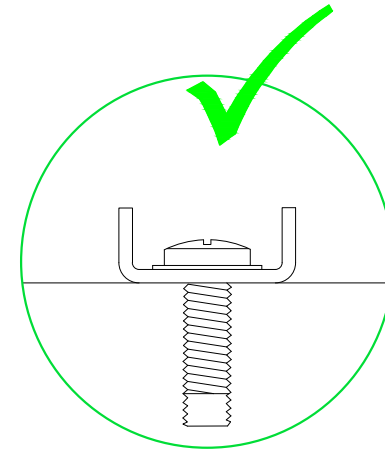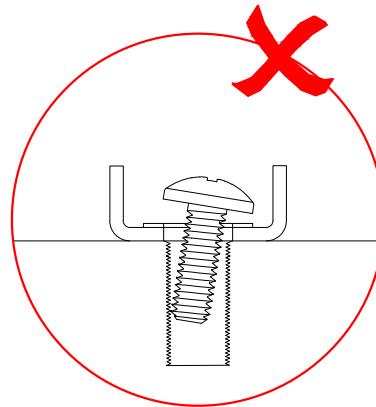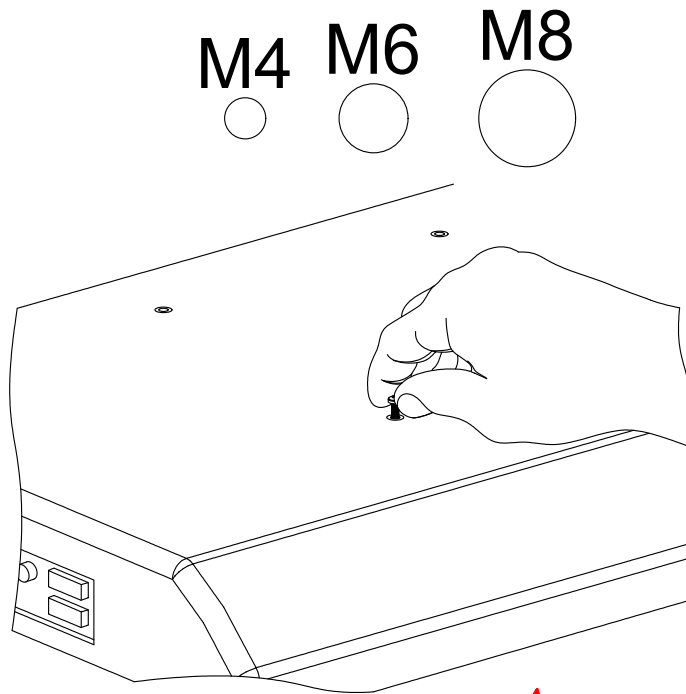


1-2 Figure out the suitable position of brackets


LOW MOUNTING HOLES

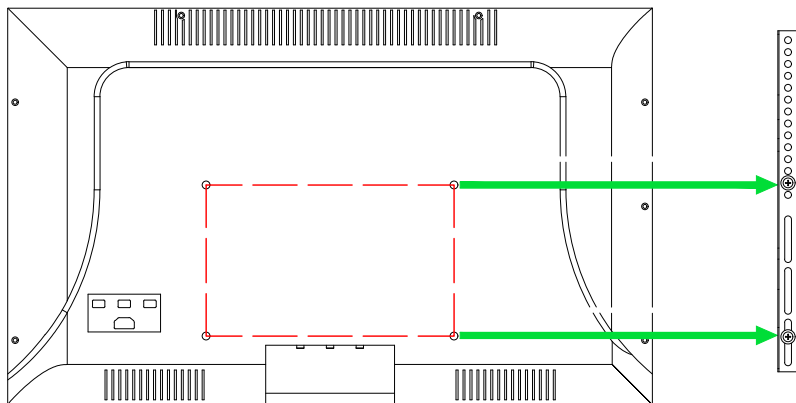


HIGH MOUNTING HOLES

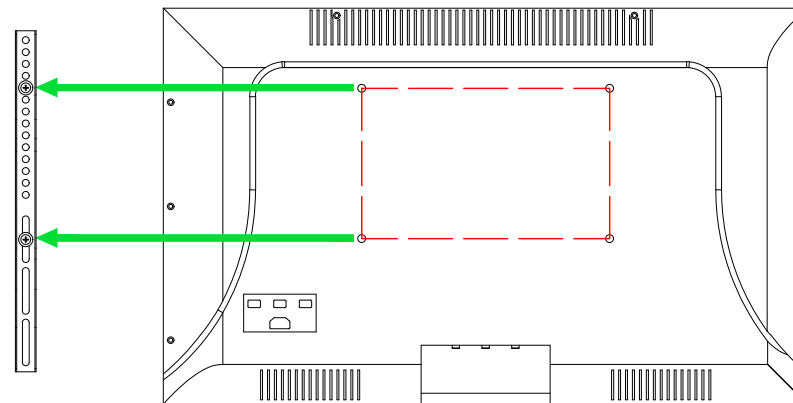

 INSTALL UP/DOWN IF NEEDED

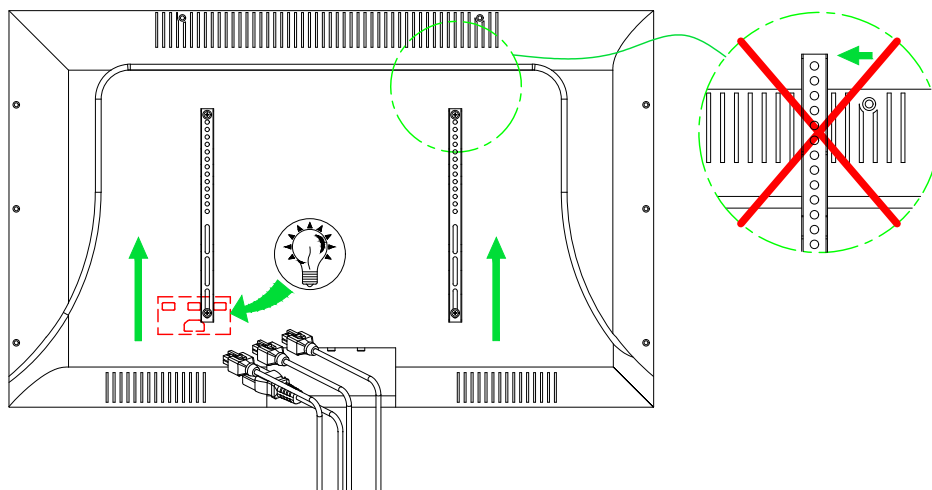


 TV BRACKETS MUST BE LEVEL

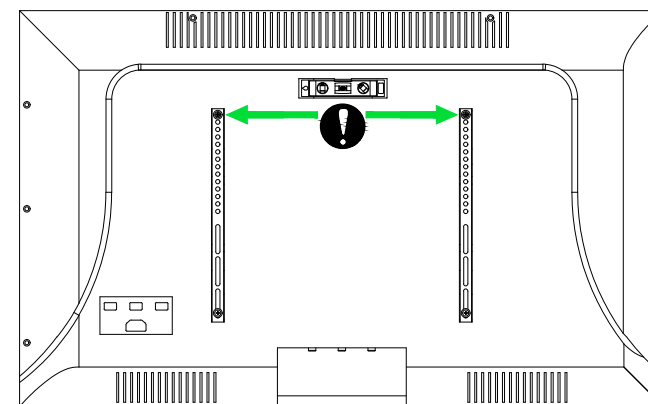


1-3 Need Spacer?

I No, choose suitable screws and washers.


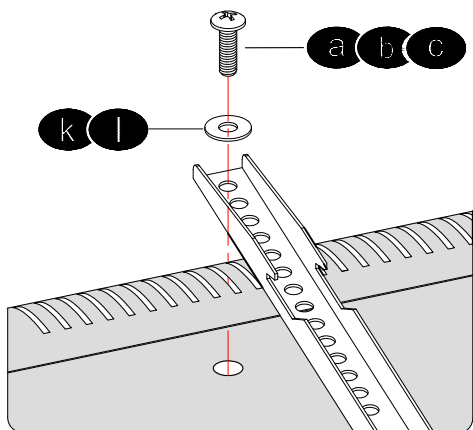


II Yes, choose suitable screws, washers and spacers.

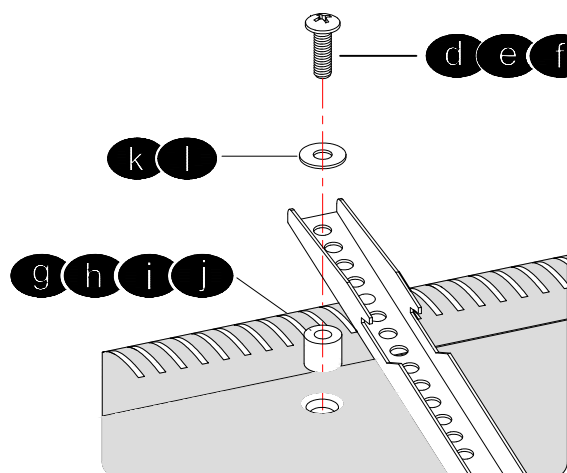

Tips: If you need to combine M6/M8(c/e/f) screws with 2.5mm spacers(i), you have to remove the inner circle.

1-4 Attach the TV Plate

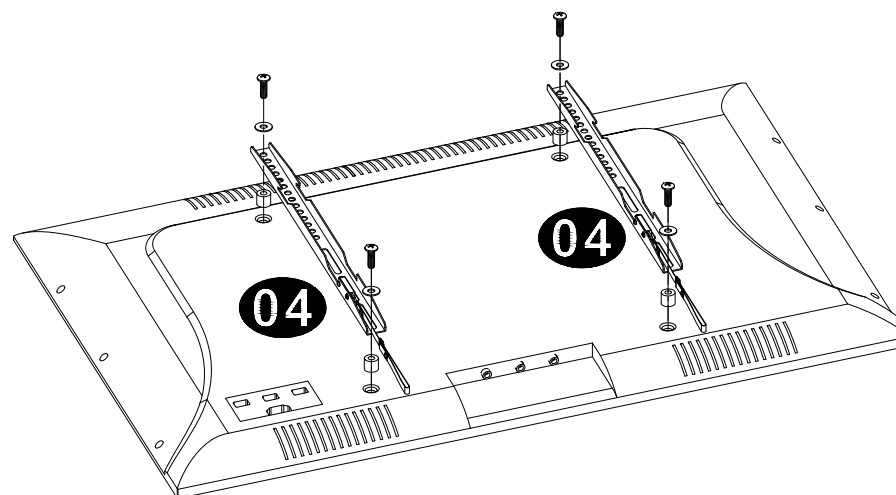



STEP 2A Attach Wall Plate to Wall Wood Stud Option

⚠ CAUTION: Avoid potential personal injury or property damage!

- Drywall covering the wall, must not exceed 5/8 in. (16 mm)
- Minimum **wood stud** size: common 2 x 4 in. (51 x 102 mm) nominal 1½ x 3½ in. (38 x 89 mm)
- Maximum horizontal space between fasteners: 16 in. (406 mm)
- Stud center must be verified

1. Locate your studs. Verify and mark the center of the stud by finding the stud edges using a thin nail, or an edge to edge stud finder.
2. Position the wall plate unit at your desired height and line up the holes with your stud center line. Level the wall plate and mark the hole locations.

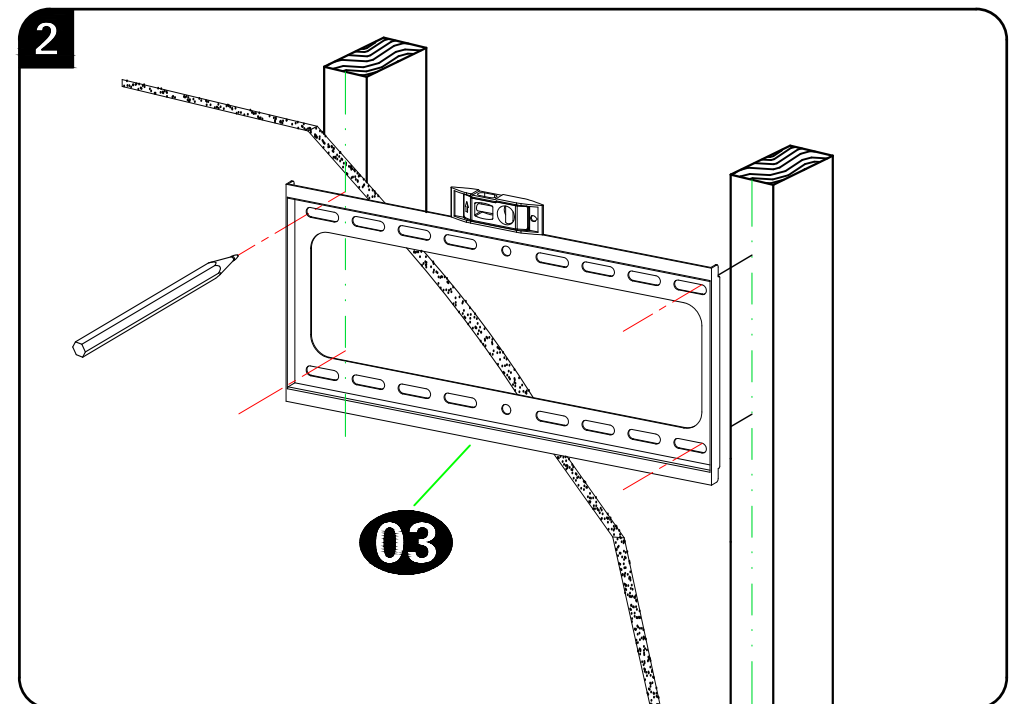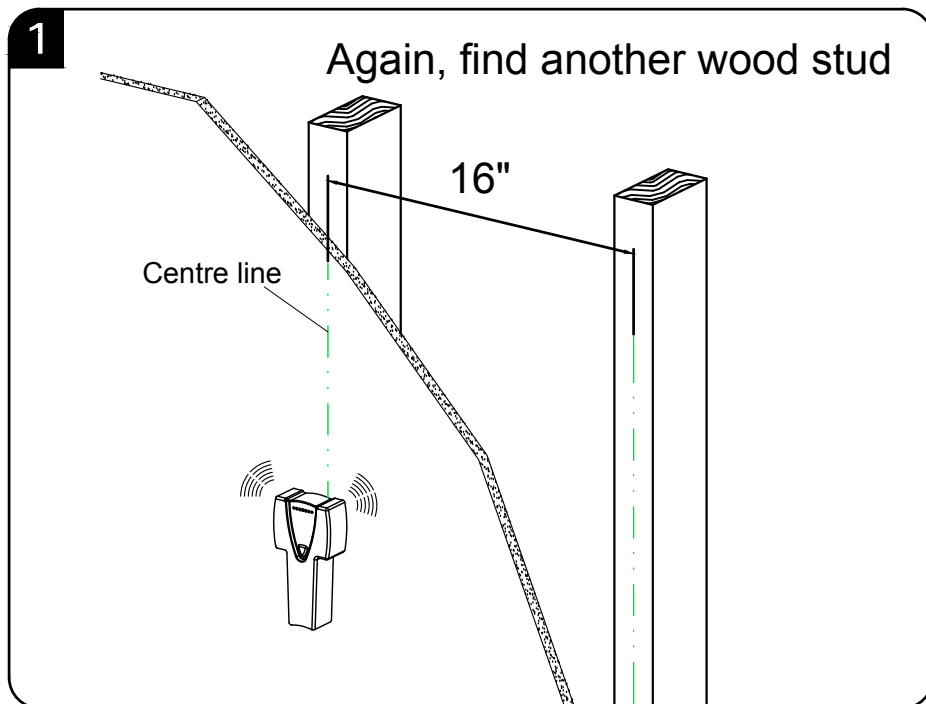



3. Drill pilot holes using a 5/32 in. (4 mm) diameter drill bit.

! IMPORTANT: Pilot holes must be drilled to a depth of 2.36 in. (60 mm). Be sure to drill into the center of the studs.

4. Install wall plate **03** using four lag bolts **01**. Tighten the lag bolts only until they are pulled firmly against the wall plate.

! CAUTION: Improper use could reduce the holding power of the lag bolt.
DO NOT over-tighten the lag bolts.

Go to STEP 3 on PAGE 13.

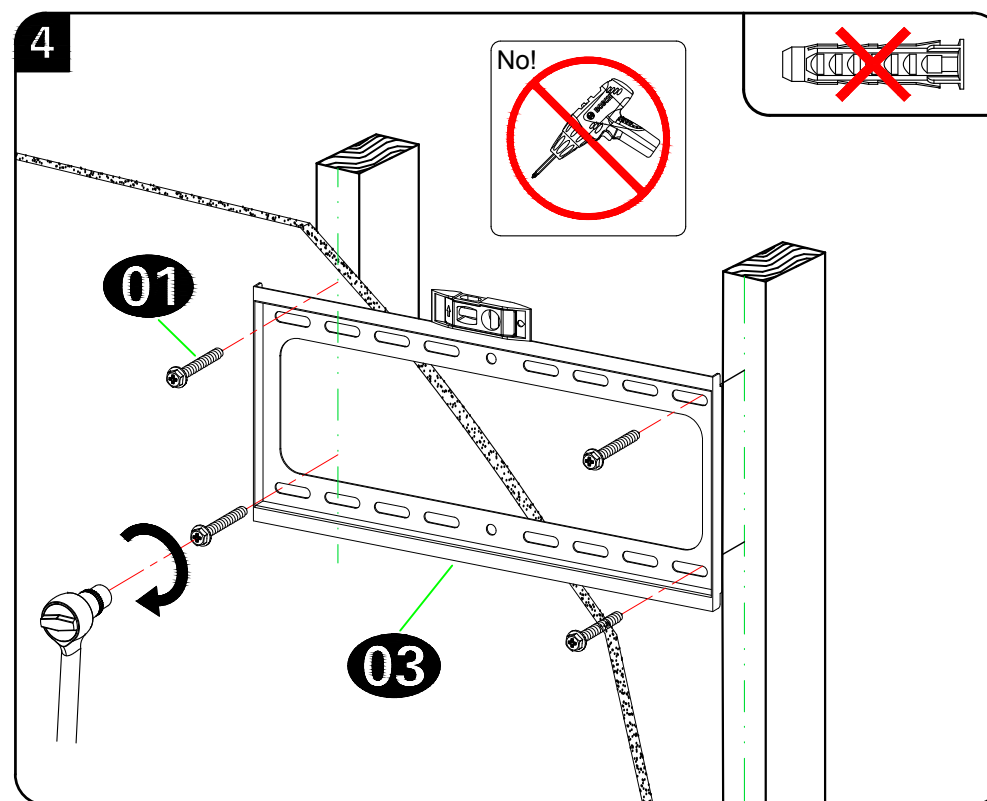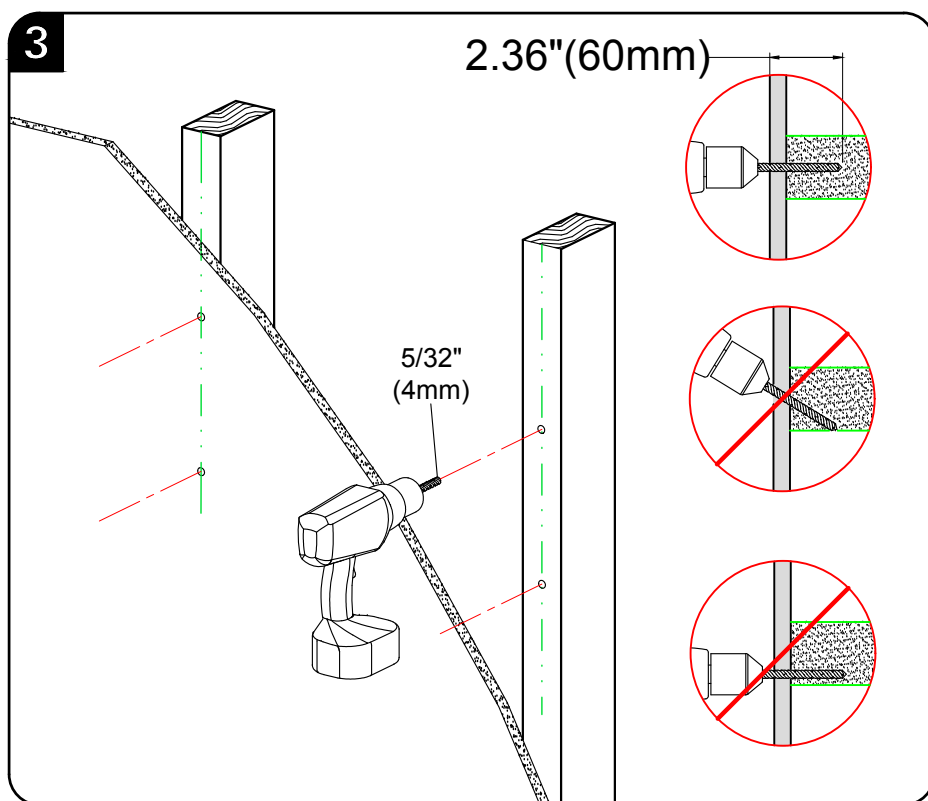



STEP 2B Attach Wall Plate to Solid Concrete Wall

⚠ **CAUTION:** Avoid potential personal injury or property damage!

- Mount the wall plate assembly unit directly onto the concrete surface
- Minimum **solid concrete** thickness: 8 in. (203 mm)

1. Position the wall plate unit on the wall at your desired height. Level the wall plate and mark the hole locations.
2. Drill four pilot holes using a 3/8 in. (10 mm) diameter masonry drill bit.

❗ **IMPORTANT:** Pilot holes must be drilled to a depth of 2.36 in. (60 mm).

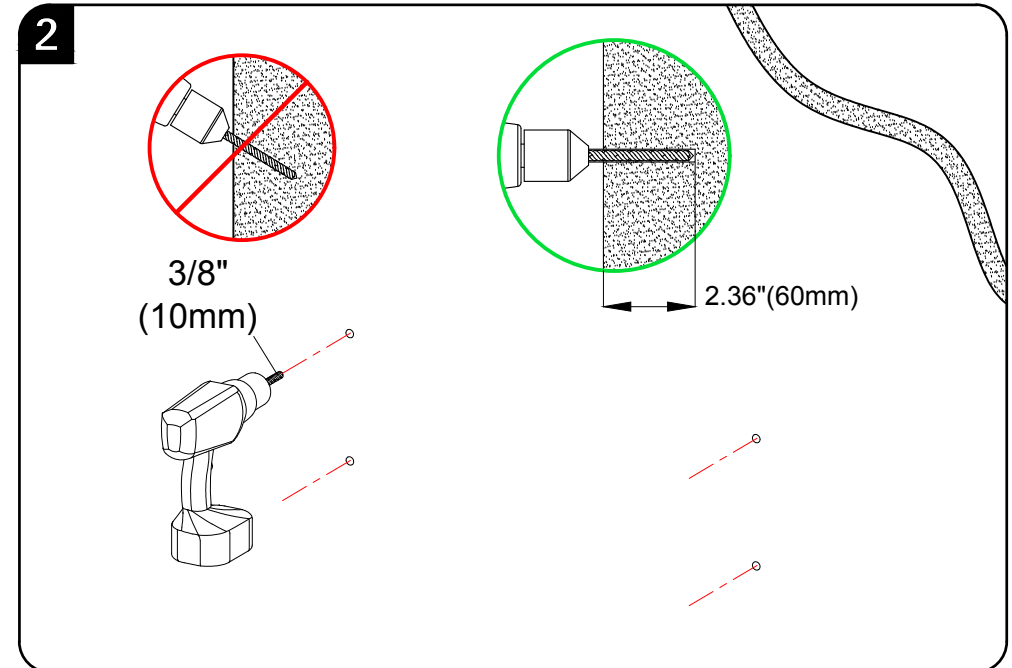
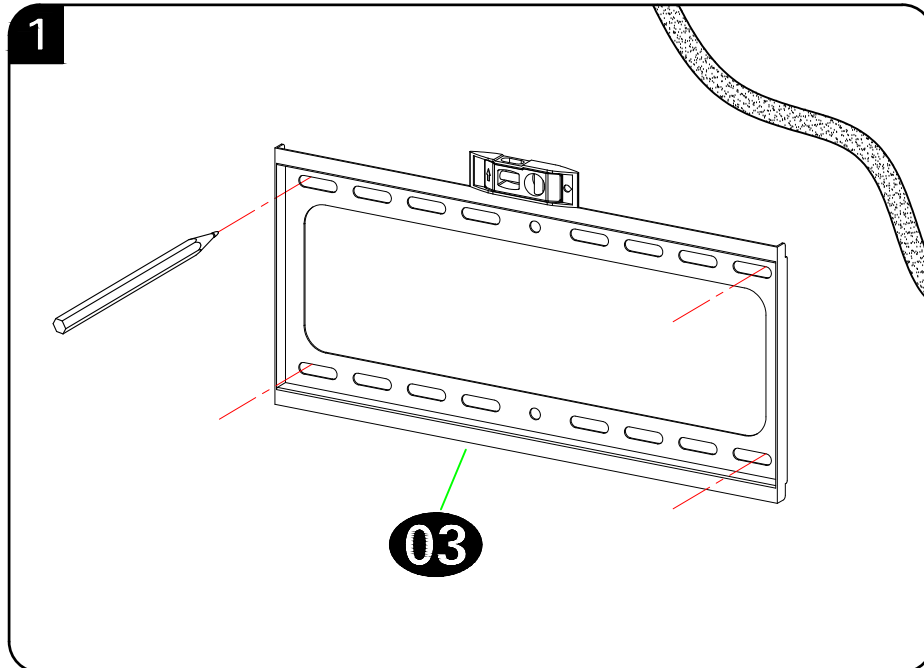


3. Insert four anchors.

⚠ CAUTION: Be sure the anchors are seated flush with the concrete surface.



4. Insert wall plate **03** using four lag bolts **01**. Tighten the lag bolts only until they are pulled firmly against the wall plate.

⚠ CAUTION: Improper use could reduce the holding power of the lag bolt.
DO NOT over-tighten the lag bolts.

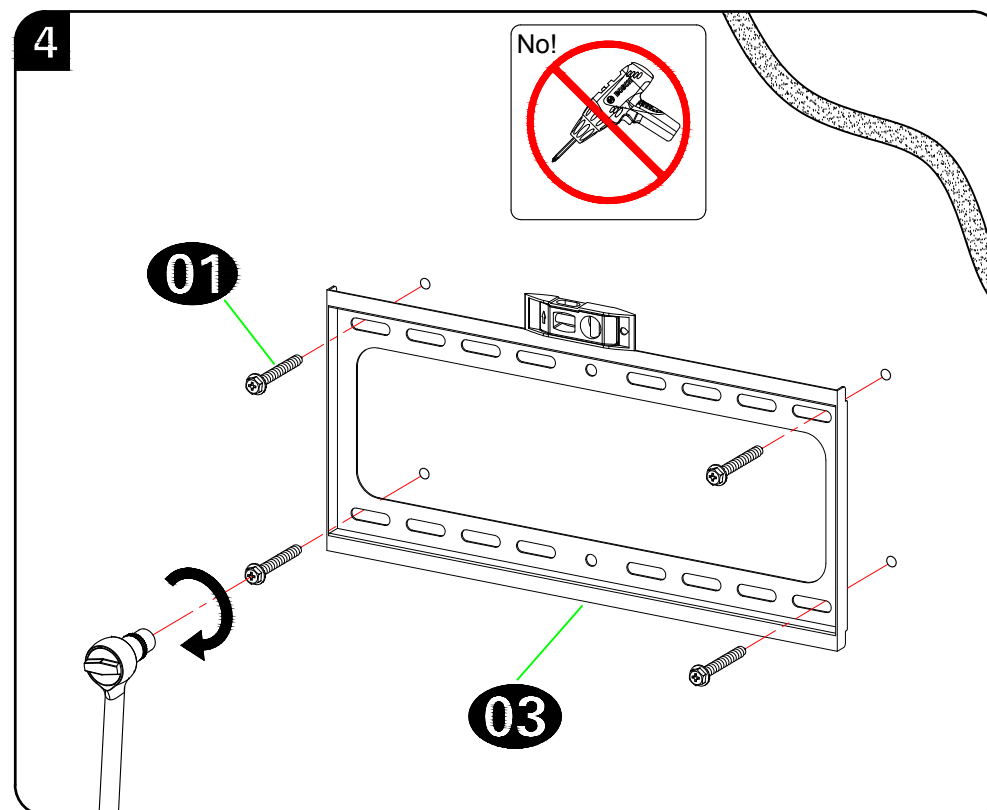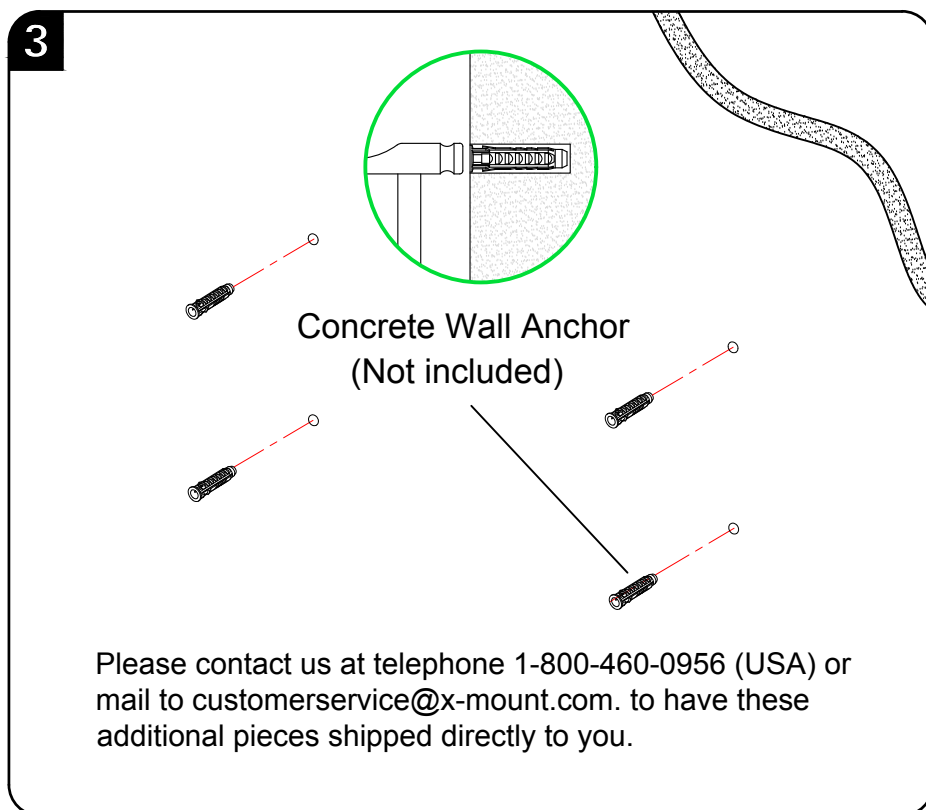


STEP 3 Hang and Secure TV to Wall Plate

Before hanging TV, please try to pull the mount to make sure that it has been assembled on the wall tightly.

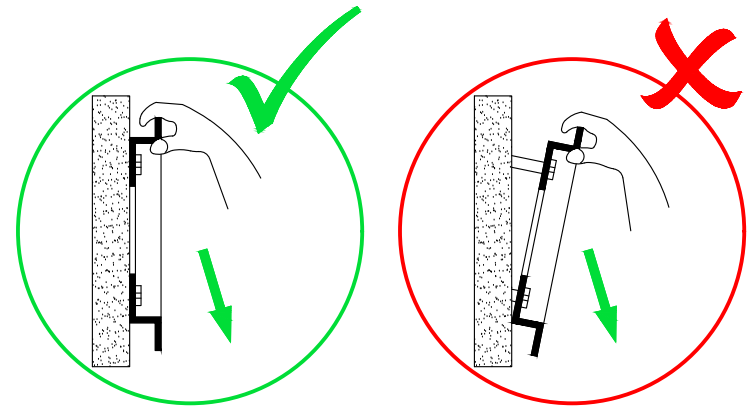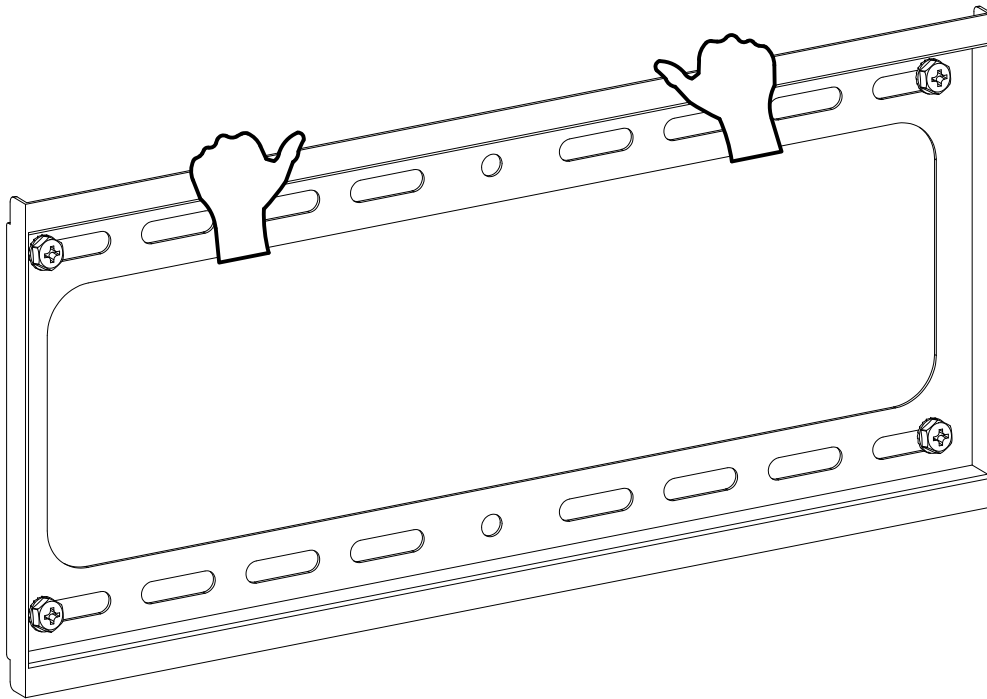


100lbs.(45.5kg)

STEP 4 Hang and Secure TV to Wall Plate

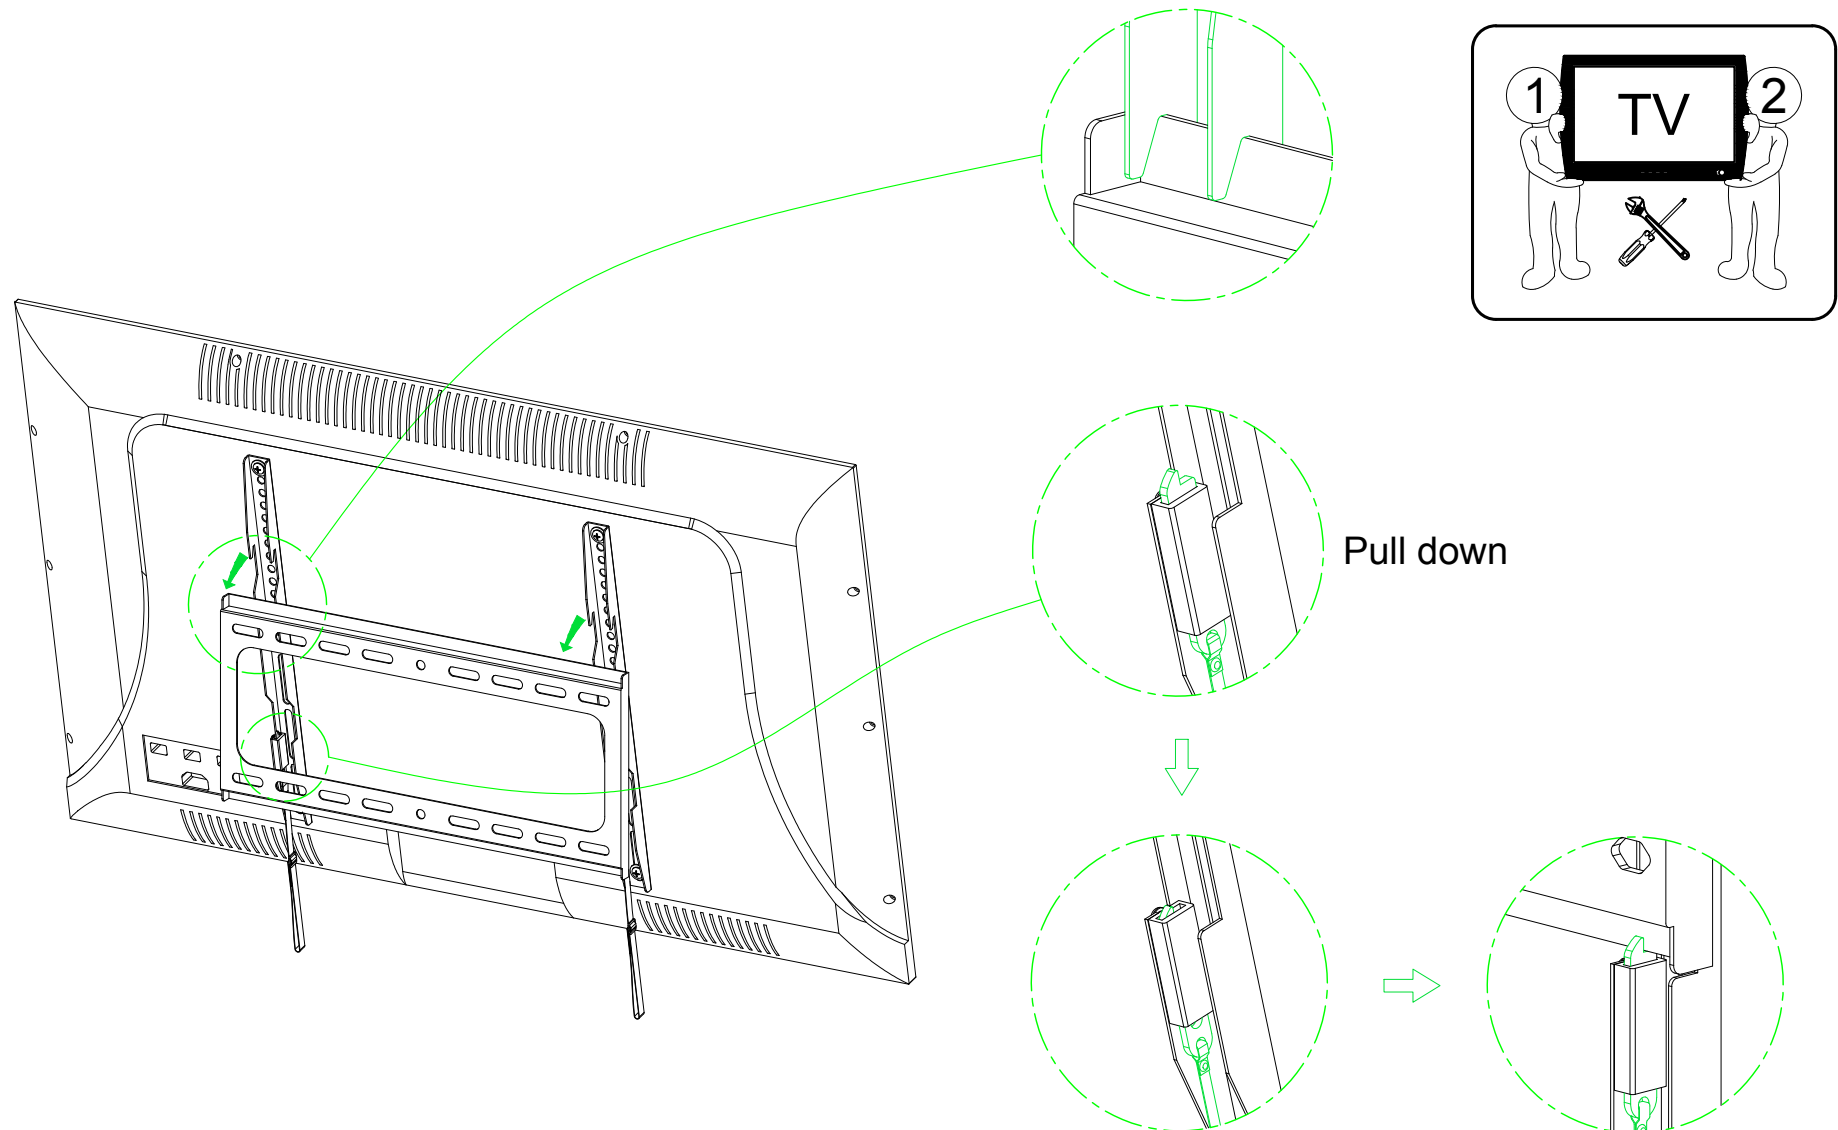

Take Down the TV from the Mount

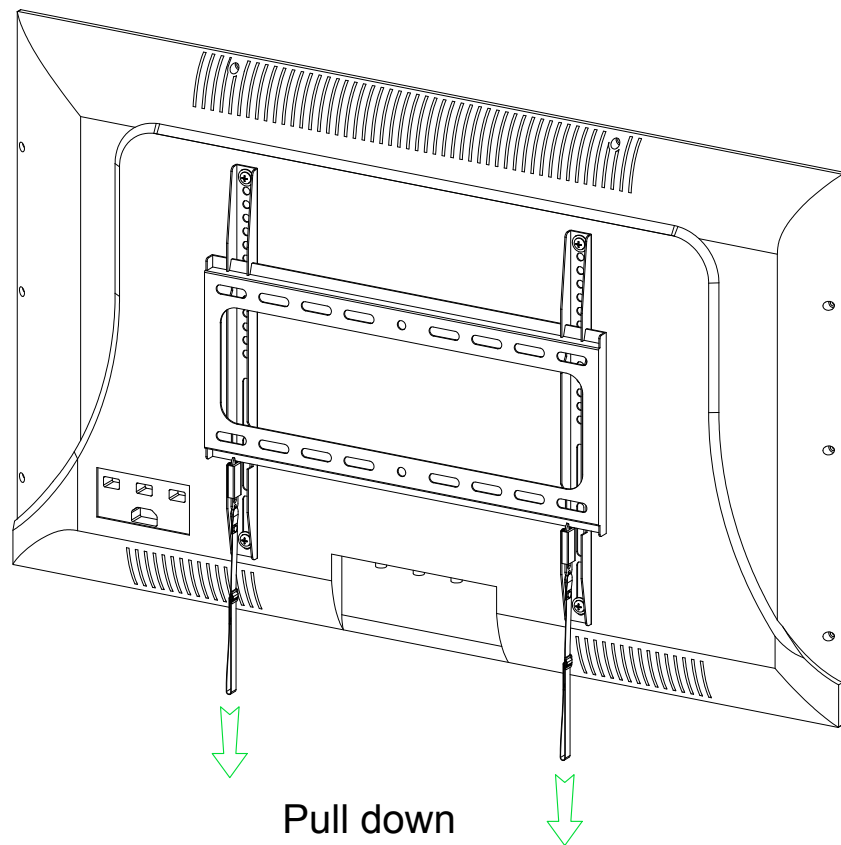

Pull down
the straps

