

XML025-01 INSTRUCTION MANUAL

For 37-90" TV

If you have any questions along the way, just give us a call
1-800-460-0956 or mail to customerservice@x-mount.com.

We're ready to help!


⚠ CAUTION: PLEASE READ ENTIRE MANUAL PRIOR TO USE AND SAVE THESE INSTRUCTIONS.

Before getting started, let's check below lists to make sure it is just right for you!

Check your TV VESA is within Min and Max size

1

MAX:600mm/23.62"
(MIN:200mm/7.87")



MAX:400mm/15.75"
(MIN:100mm/3.94")

No? This mount is NOT compatible.

Yes? Perfect !

Does your TV (including accessories) weigh MORE than 132 lbs. (60 kg)?

2




No? Perfect – you may continue.

Yes? This mount is NOT compatible.


⚠ CAUTION: DO NOT exceed the maximum weight indicated. This mounting system is intended for use only with the maximum weights indicated. Use with products heavier than the maximum weights indicated may result in collapse of the mount and its accessories, causing possible injury.

What is your wall made of?

3



Drywall with wood studs?



Solid concrete




Unsure?


Call Customer Service:
1-800-460-0956

Do you have all the tools needed? (NOT INCLUDE)


4




Tape Measure



Pencil



Level



Screw driver



Electric Drill



1/2 in.
(13 mm)
Socket Wrench

Wood Stud Install



Stud Finder



7/32 in.
(5.5 mm)
Wood Drill Bit

Concrete Install



3/8 in.
(10 mm)
Masonry Drill Bit



Hammer


CAUTION

5


- This product is designed for use in wood stud, solid concrete walls - DO NOT install into drywall alone
- The wall must be capable of supporting five times the weight of the TV and mount itself
- Do not use this product for any purpose not explicitly specified by manufacturer
- Manufacturer is not responsible for damage or injury caused by incorrect assembly or use

Dimensions


TV INTERFACE

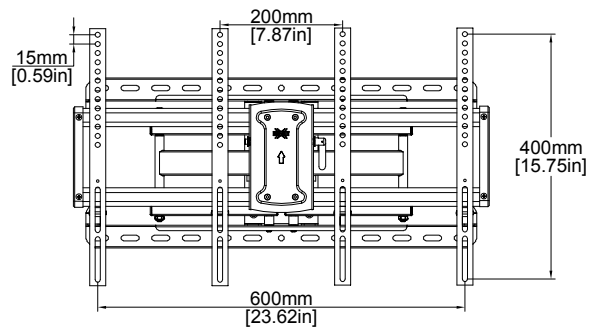


3-D

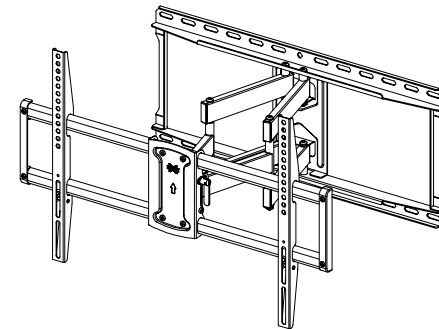


WALL PLATE

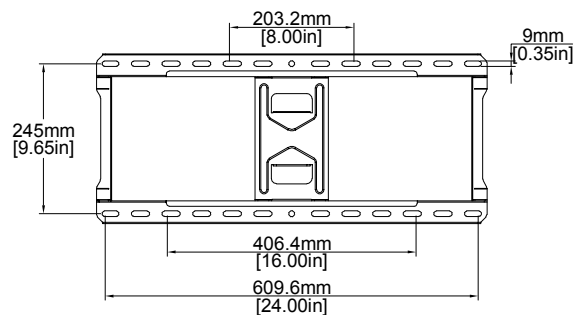


TOP VIEW - EXTENDED

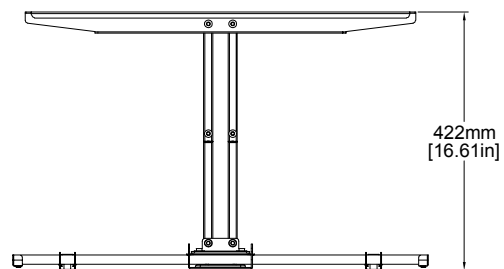

SIDE VIEW - EXTENDED

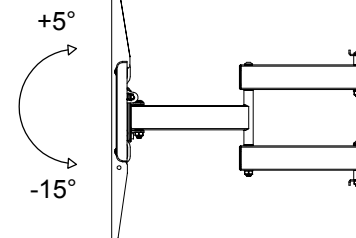


FULLY ASSEMBLED MOUNT

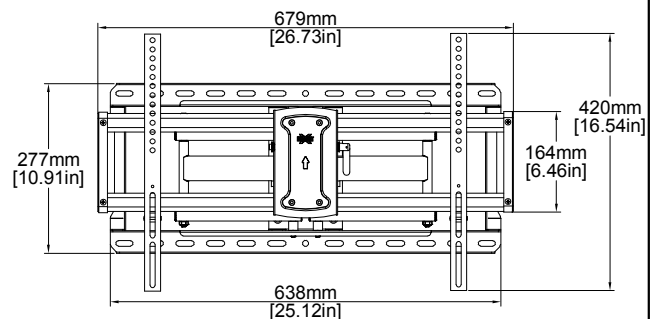

TOP VIEW - RETRACTED



SIDE VIEW - EXTENDED

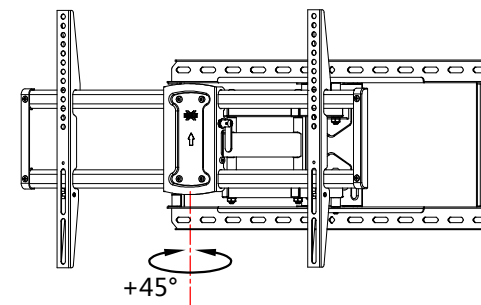

Parts and Hardware


⚠ WARNING: This product contains small items that could be a choking hazard if swallowed. Before starting assembly, verify all parts are included and undamaged. If any parts are missing or damaged, do not return the damaged item to your dealer; contact Customer Service.

Never use damaged parts!

📄 NOTE: Not all hardware included will be used.

Parts and Hardware for STEP 1


TV Brackets



05 x2


TV Screws

M4x12mm




a x4

M4x30mm




d x4

M6x12mm




b x4

M6x35mm




e x4

M8x25mm



c x4


M8x45mm

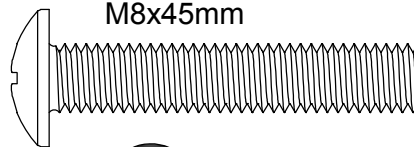

f x4


Spacers

M8x22mm



g x4

10mm




h x4

2.5mm



i x8


M6x17mm



j x4


Washers

M4



k x4


M6




l x4

Parts and Hardware for STEP 2


Wall Plate Unit

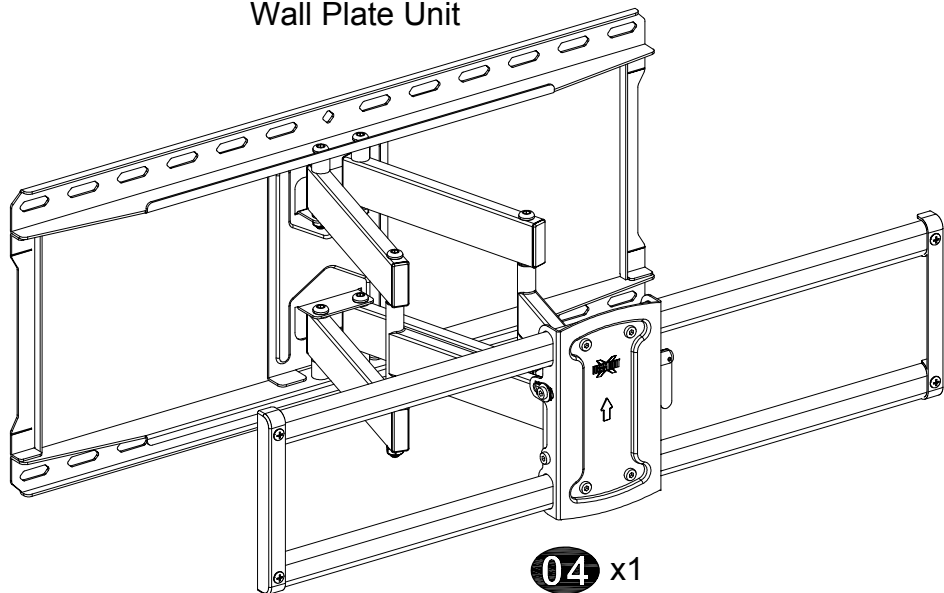

Mounting template

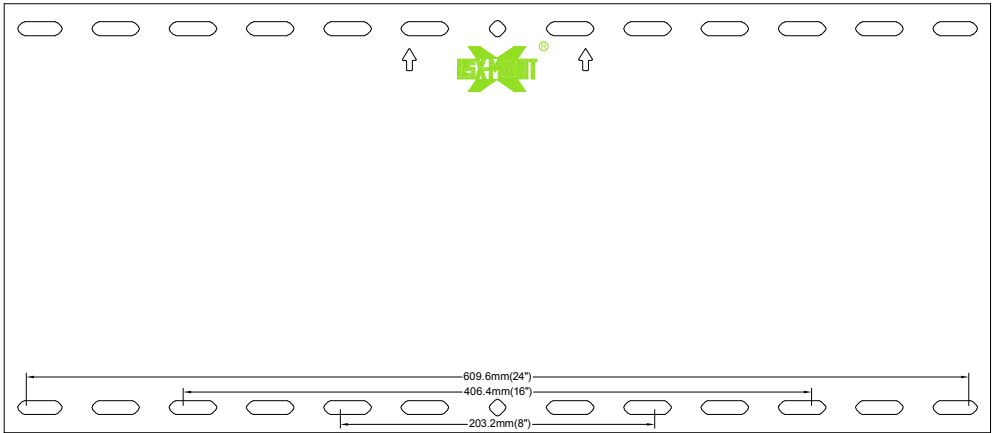

Lag Bolt



01 x4


Concrete wall anchor (NOT INCLUDED)



Concrete Wall Anchor
4pcs


Contact us at telephone 1-800-460-0956 (USA) or
mail to customerservice@x-mount.com. to have
these additional pieces shipped directly to you.

M6x16mm Bolt



02 x2

Allen Key









03 x1



Velcro x3


STEP 1 Attach Brackets to TV

1-1 Select TV Screws

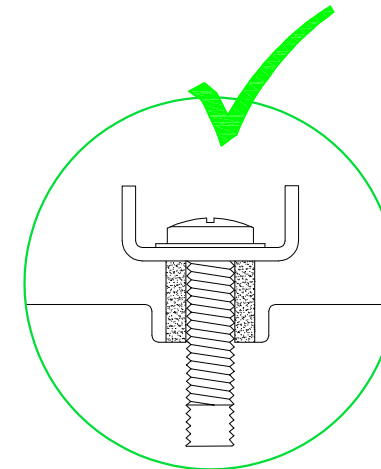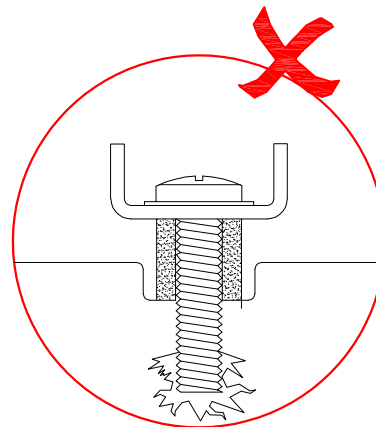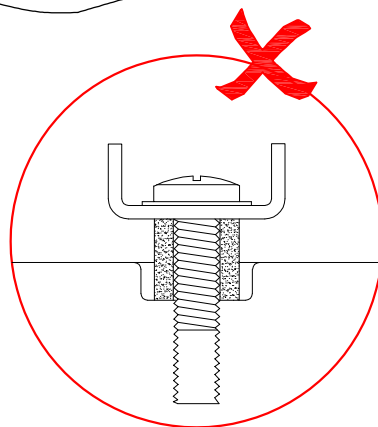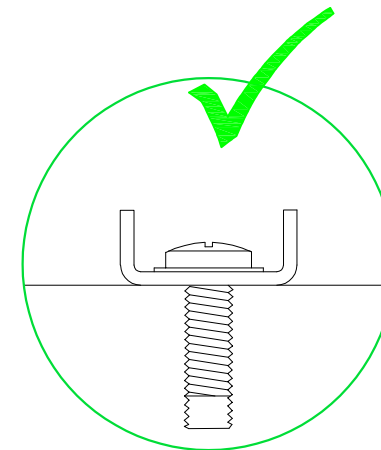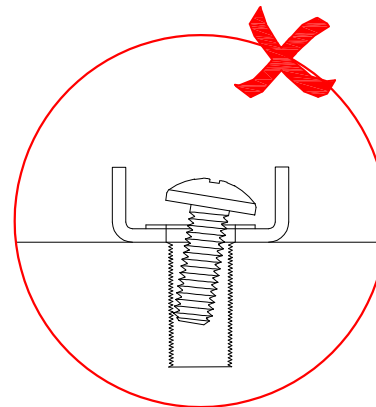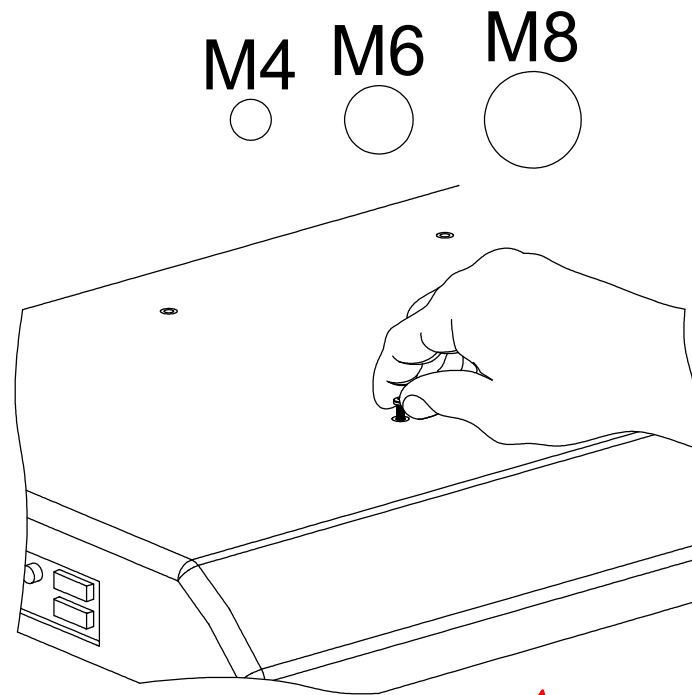


1-2 Figure out the suitable position of brackets


LOW MOUNTING HOLES

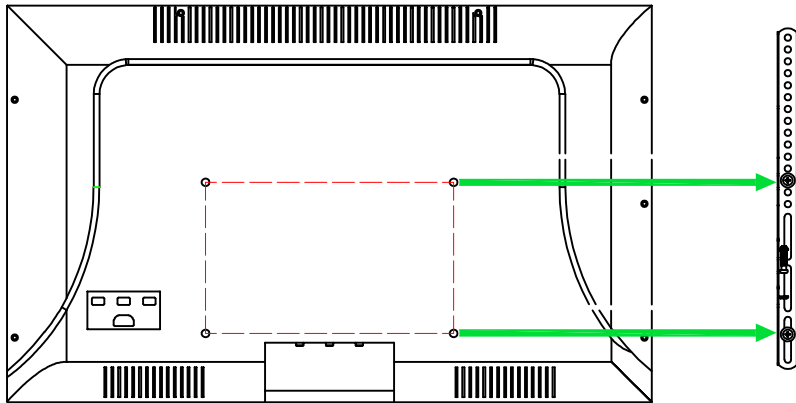


HIGH MOUNTING HOLES

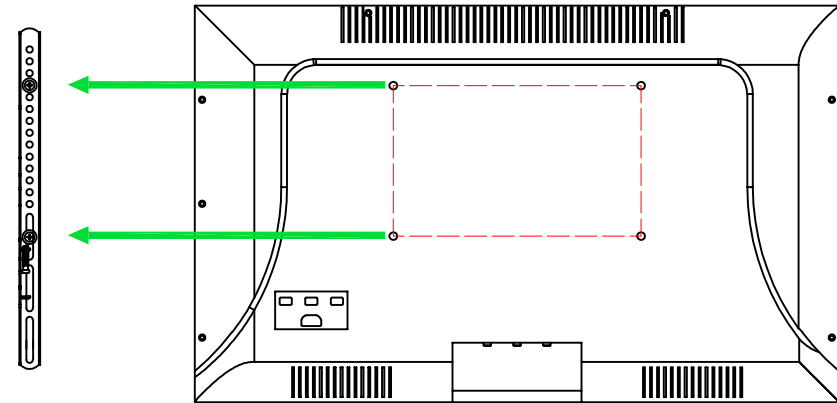

 INSTALL UP/DOWN IF NEEDED

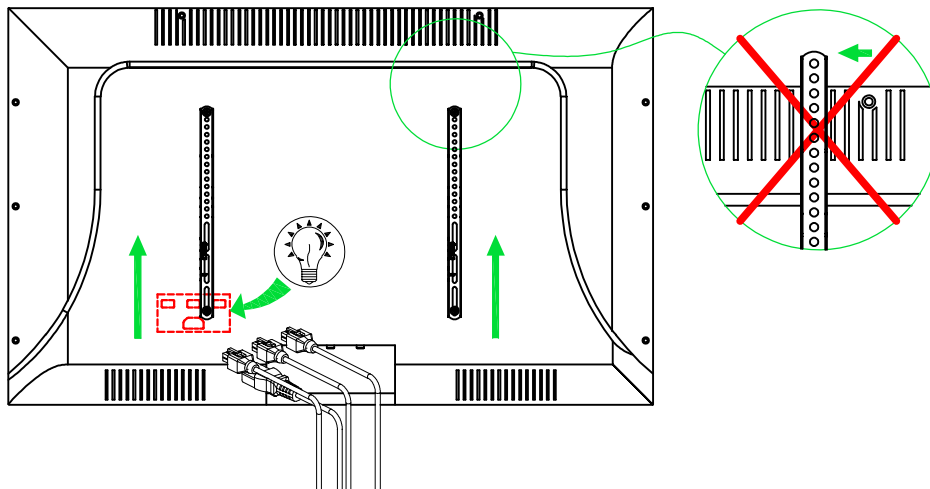


 TV BRACKETS MUST BE LEVEL

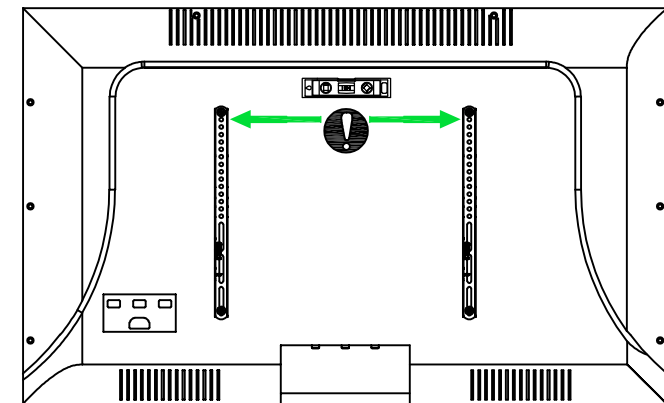


1-3 Need Spacer?

I No, choose suitable screws and washers.


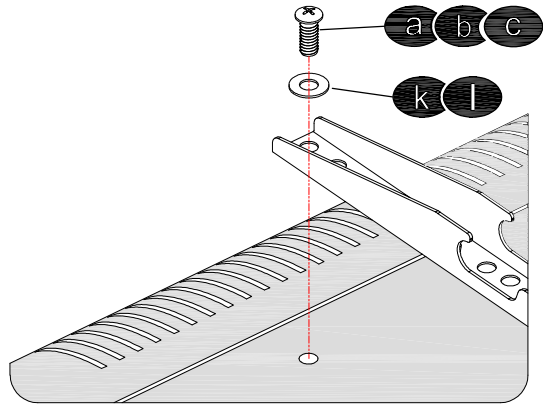


II Yes, choose suitable screws, washers and spacers.

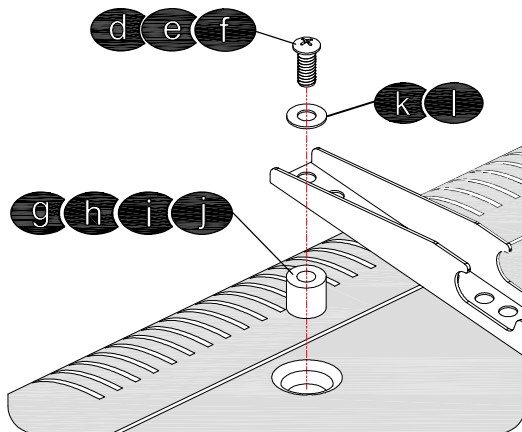

Tips: If you need to combine M6/M8(c/e/f) screws with 2.5mm spacers(i), you have to remove the inner circle.

1-4 Attach the TV Plate

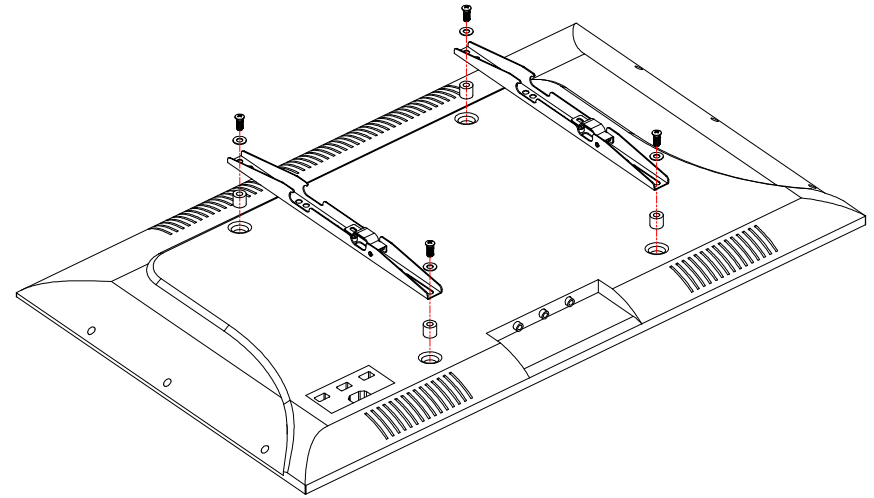



STEP 2A Attach Wall Plate to Wall Wood Stud Option

⚠ CAUTION: Avoid potential personal injury or property damage!

- Drywall covering the wall, must not exceed 5/8 in. (16 mm)
- Minimum **wood stud** size: common 2 x 4 in. (51 x 102 mm) nominal 1½ x 3½ in. (38 x 89 mm)
- Maximum horizontal space between fasteners: 24 in. (609 mm)
- Stud center must be verified

1. Locate your studs. Verify and mark the center of the stud by finding the stud edges using a thin nail, or an edge to edge stud finder.
2. Position the mounting template at your desired height and line up the holes with your stud center line. Level the wall plate and mark the hole locations.

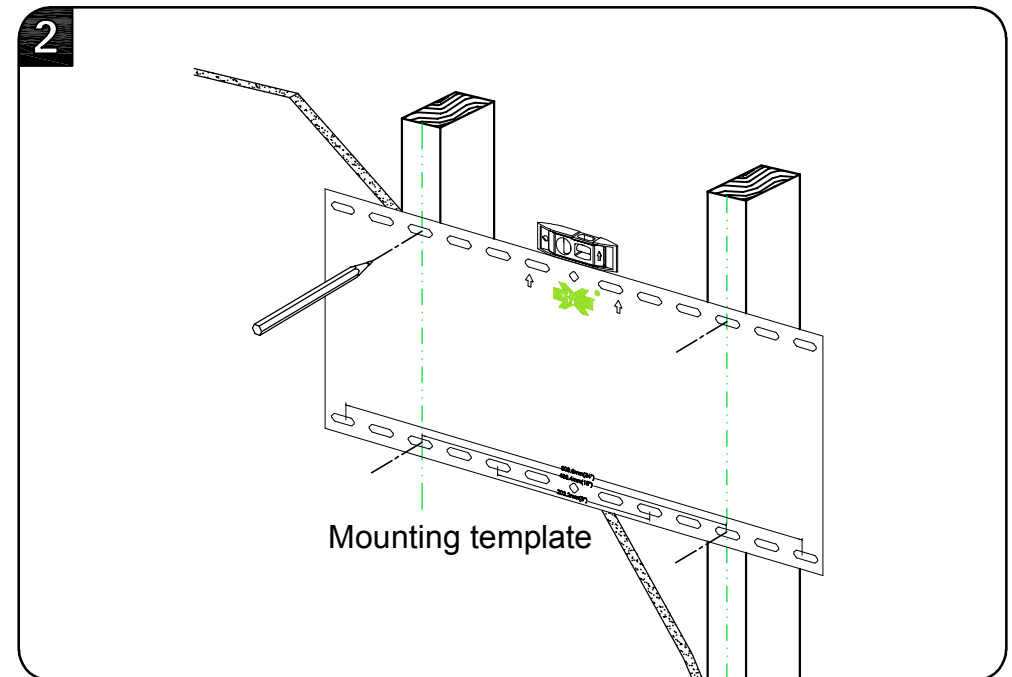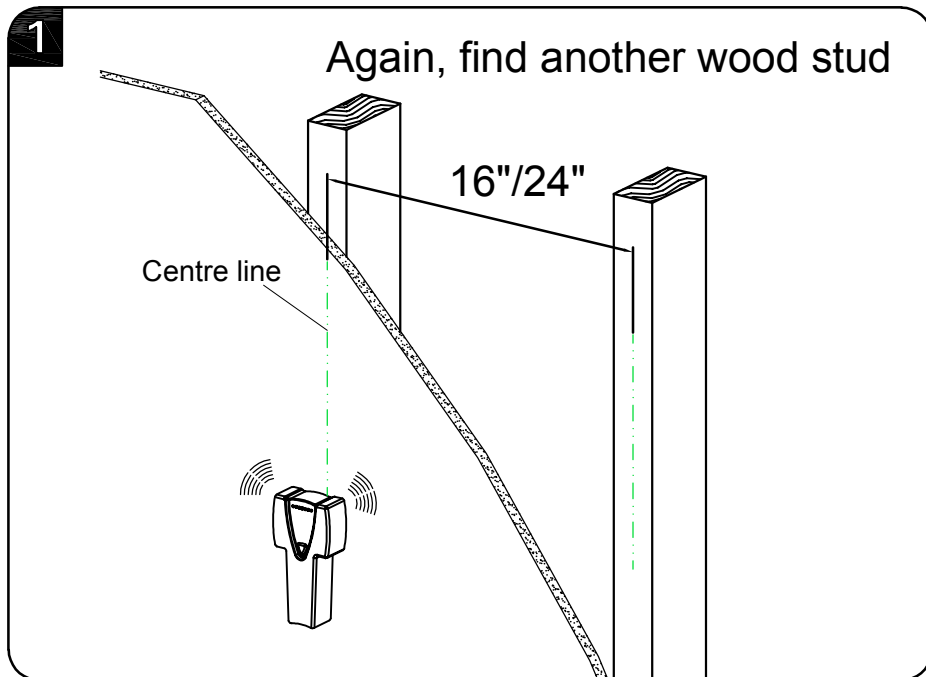



3. Drill pilot holes using a 7/32 in. (5.5 mm) diameter drill bit.

❗ **IMPORTANT:** Pilot holes must be drilled to a depth of 2.5 in. (64 mm). Be sure to drill into the center of the studs.

4. Install wall plate **04** using four lag bolts **01**. Tighten the lag bolts only until they are pulled firmly against the wall plate.

⚠ **CAUTION:** Improper use could reduce the holding power of the lag bolt.
DO NOT over-tighten the lag bolts.

Go to STEP 4 on PAGE 13.

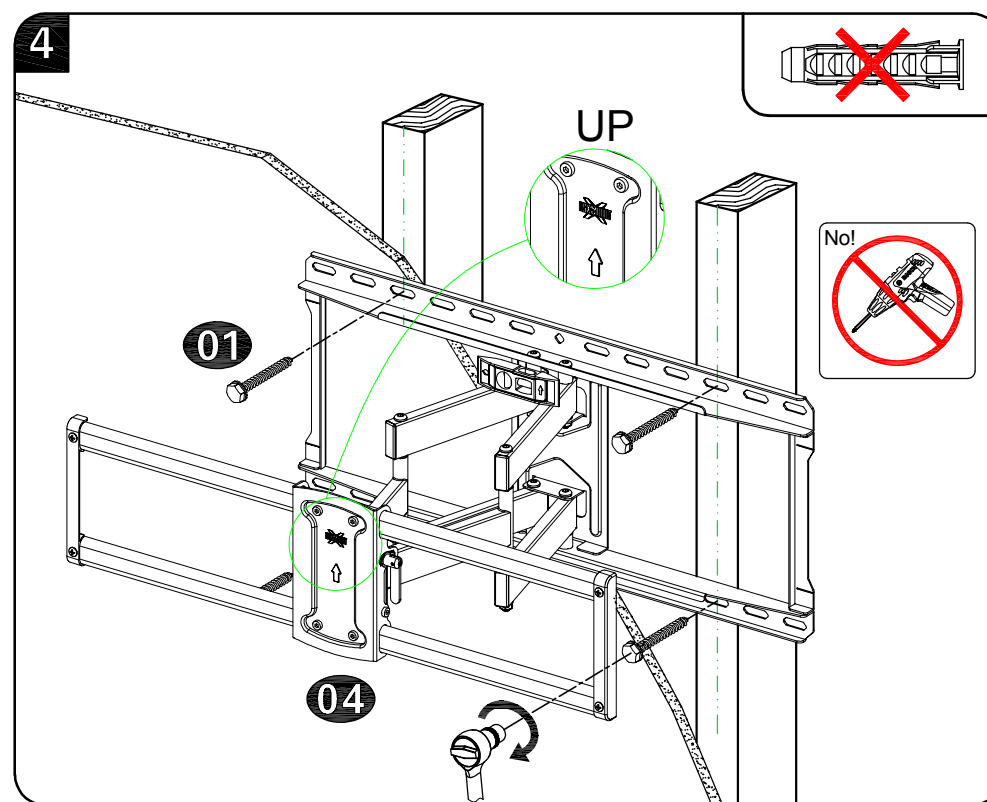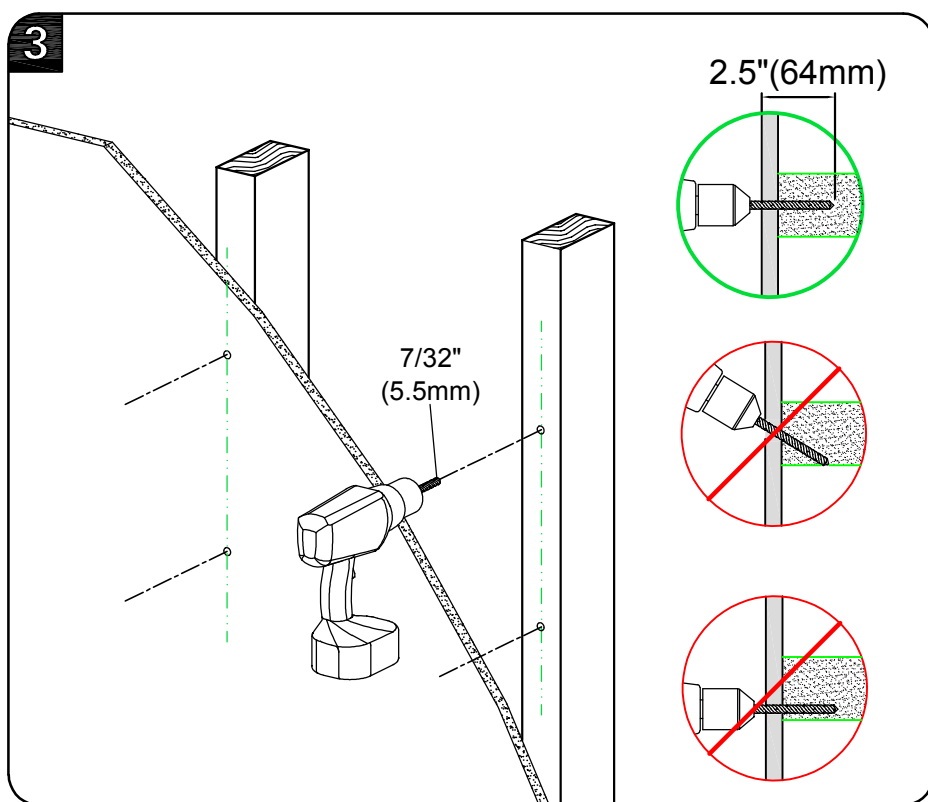



STEP 2B Attach Wall Plate to Solid Concrete Wall

⚠ CAUTION: Avoid potential personal injury or property damage!

- Mount the wall plate assembly **04** directly onto the concrete surface
- Minimum **solid concrete** thickness: 8 in. (203 mm)

1. Position the mounting template on the wall at your desired height. Level the wall plate and mark the hole locations.
2. Drill four pilot holes using a 3/8 in. (10 mm) diameter masonry drill bit.

❗ IMPORTANT: Pilot holes must be drilled to a depth of 2.5 in. (64 mm).

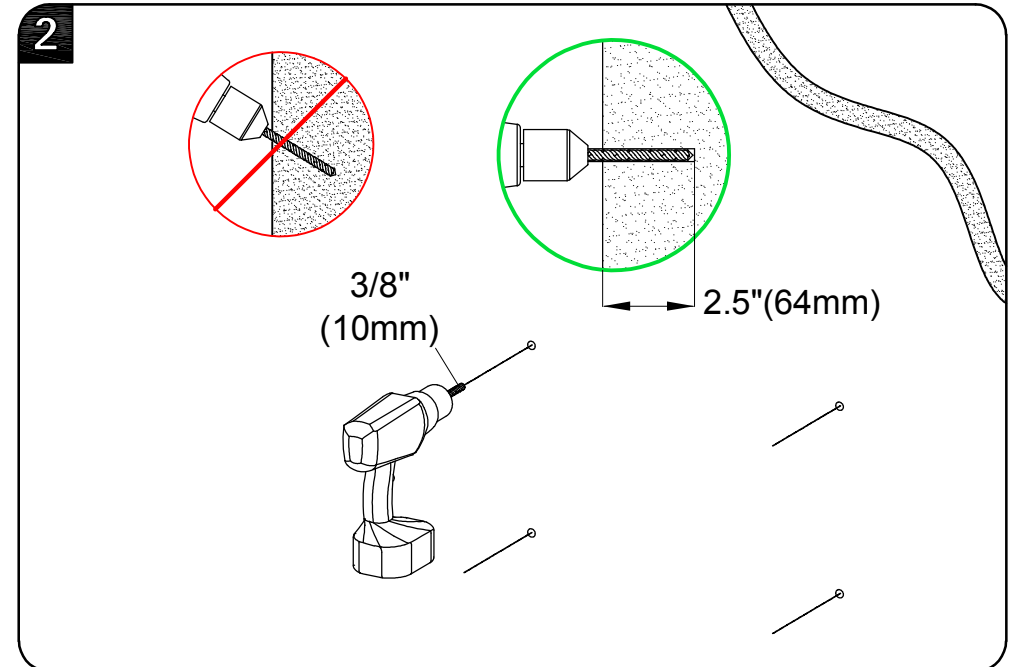
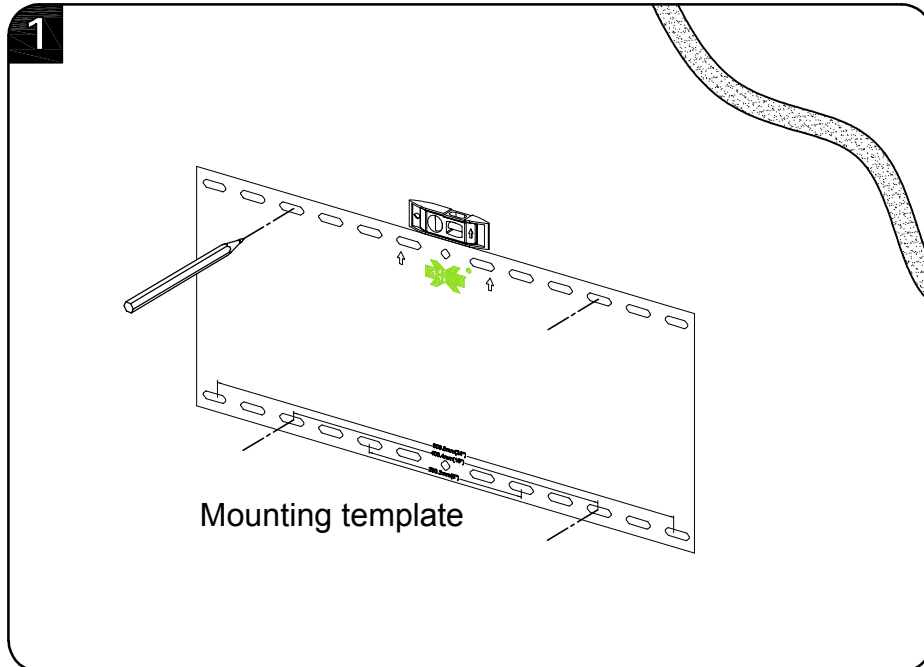


3. Insert four anchors.

⚠ CAUTION: Be sure the anchors are seated flush with the concrete surface.





4. Insert wall plate **04** using four lag bolts **01**. Tighten the lag bolts only until they are pulled firmly against the wall plate.

⚠ CAUTION: Improper use could reduce the holding power of the lag bolt.
DO NOT over-tighten the lag bolts.

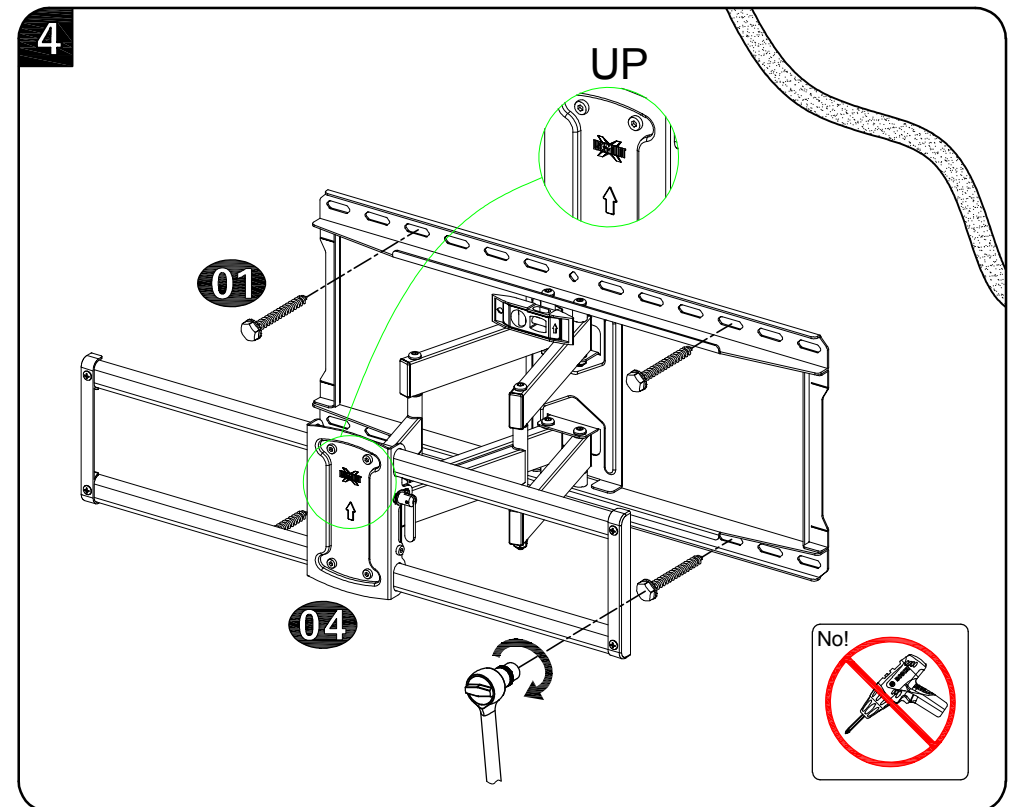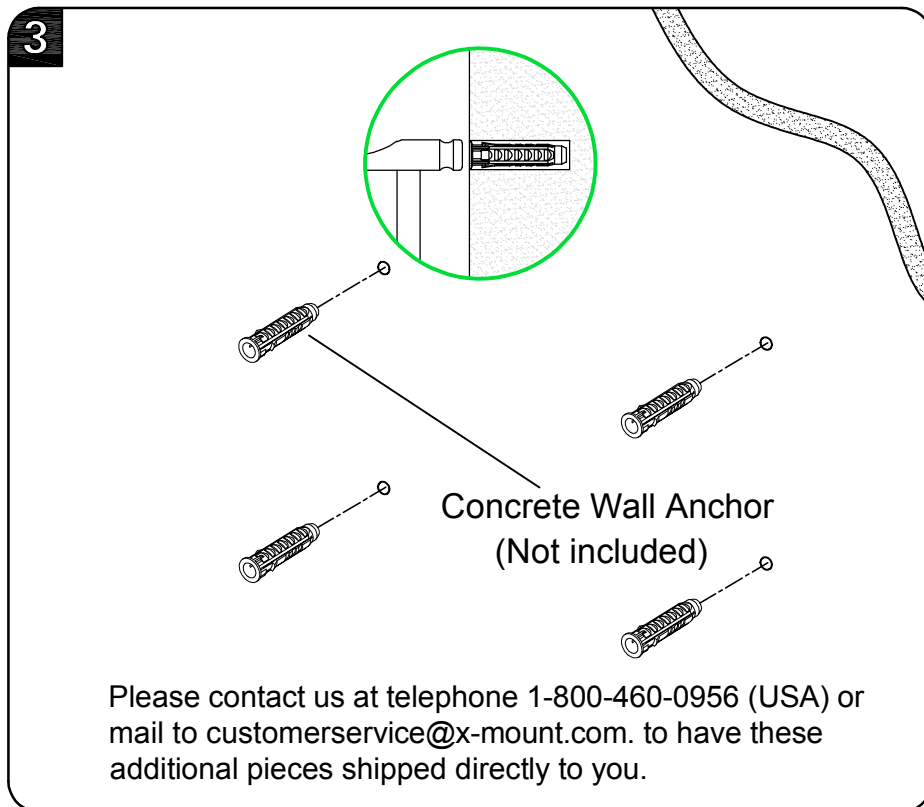



STEP 4 Wall Plate Installation Integrity Test

Before hanging TV, please try to pull the mount to make sure that it has been assembled on the wall tightly.

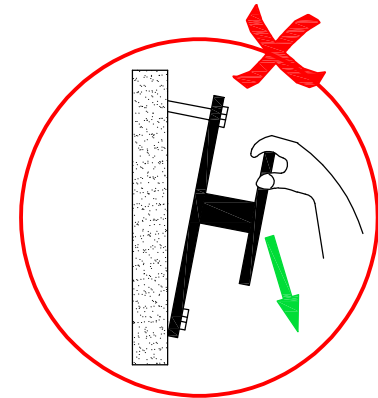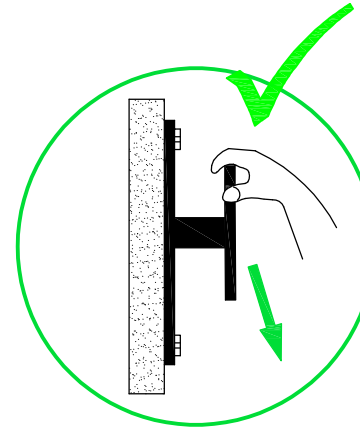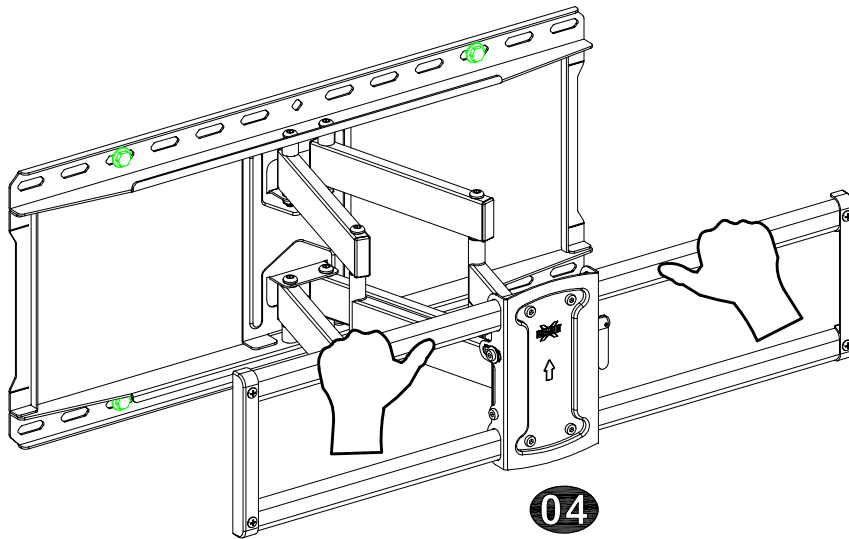


STEP 5 Hang and Secure TV to Wall Plate

Hang TV/bracket assembly onto wall plate, wrap clips on bracket around extension arms and tighten them using bolts **02**.

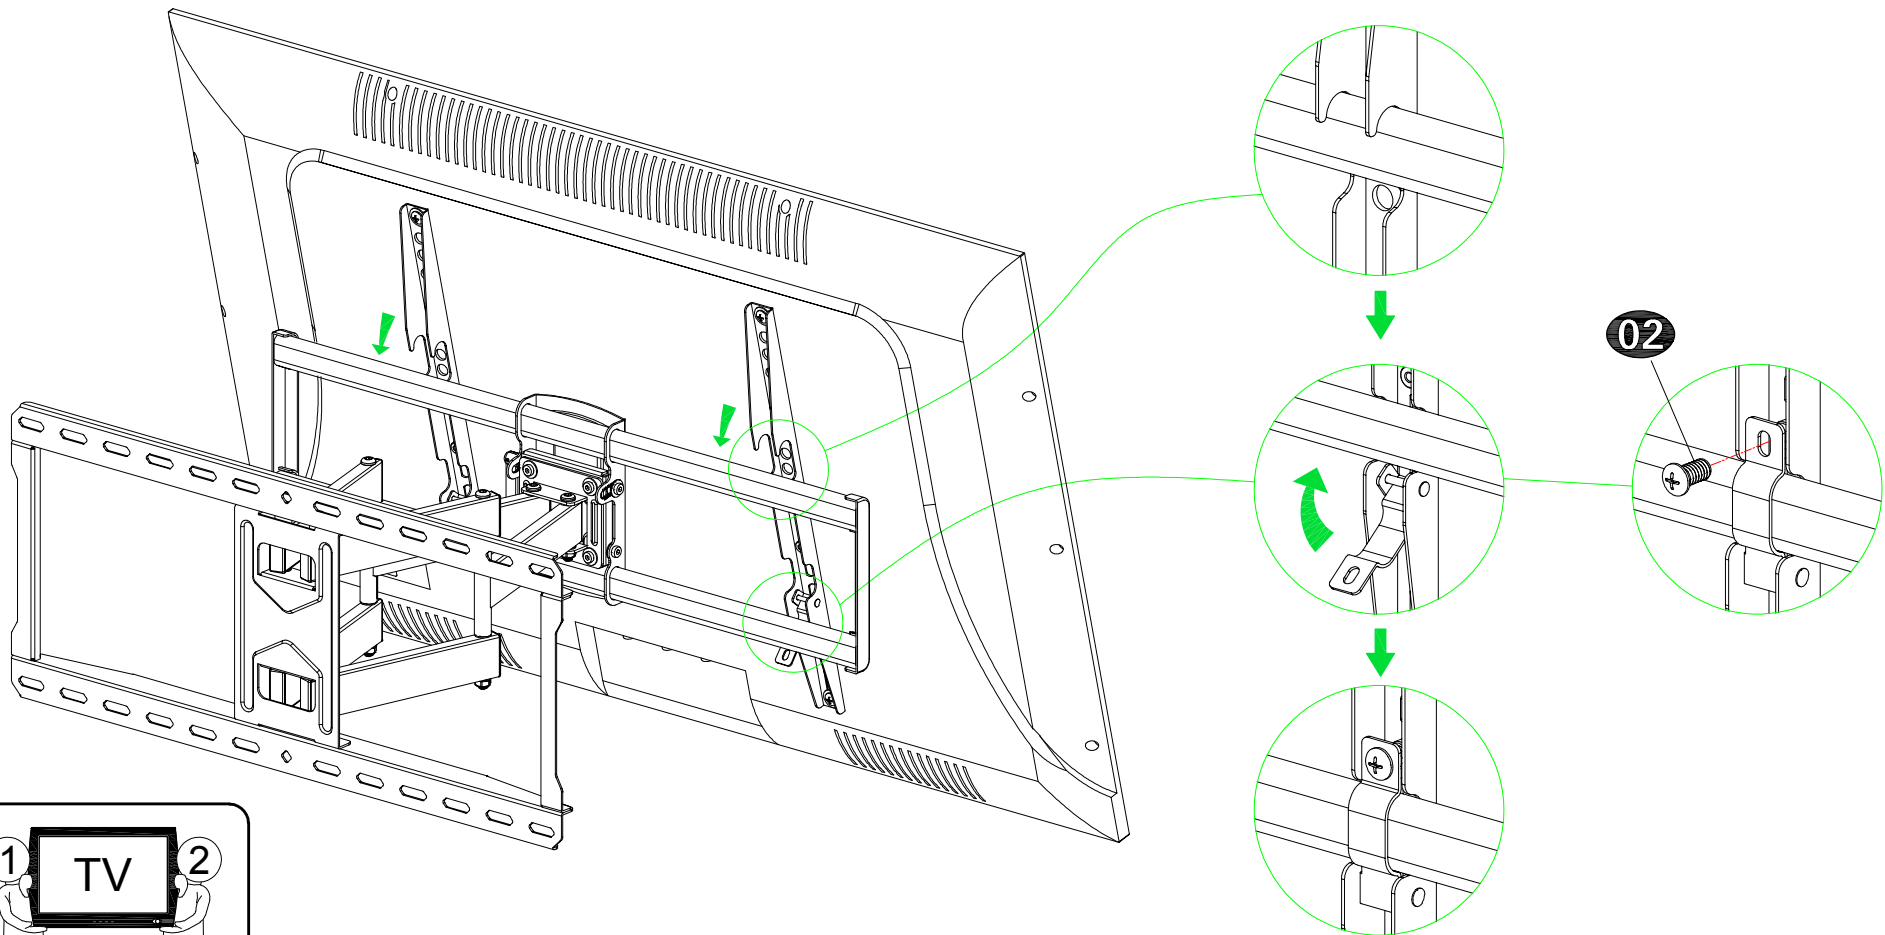


STEP 6 Adjustments

6-1 TV leveling adjustment ($\pm 4^\circ$):
Loosen 4 leveling bolts on the rear of TV plate by maximum 2 turns, adjust to level, and retighten to secure.

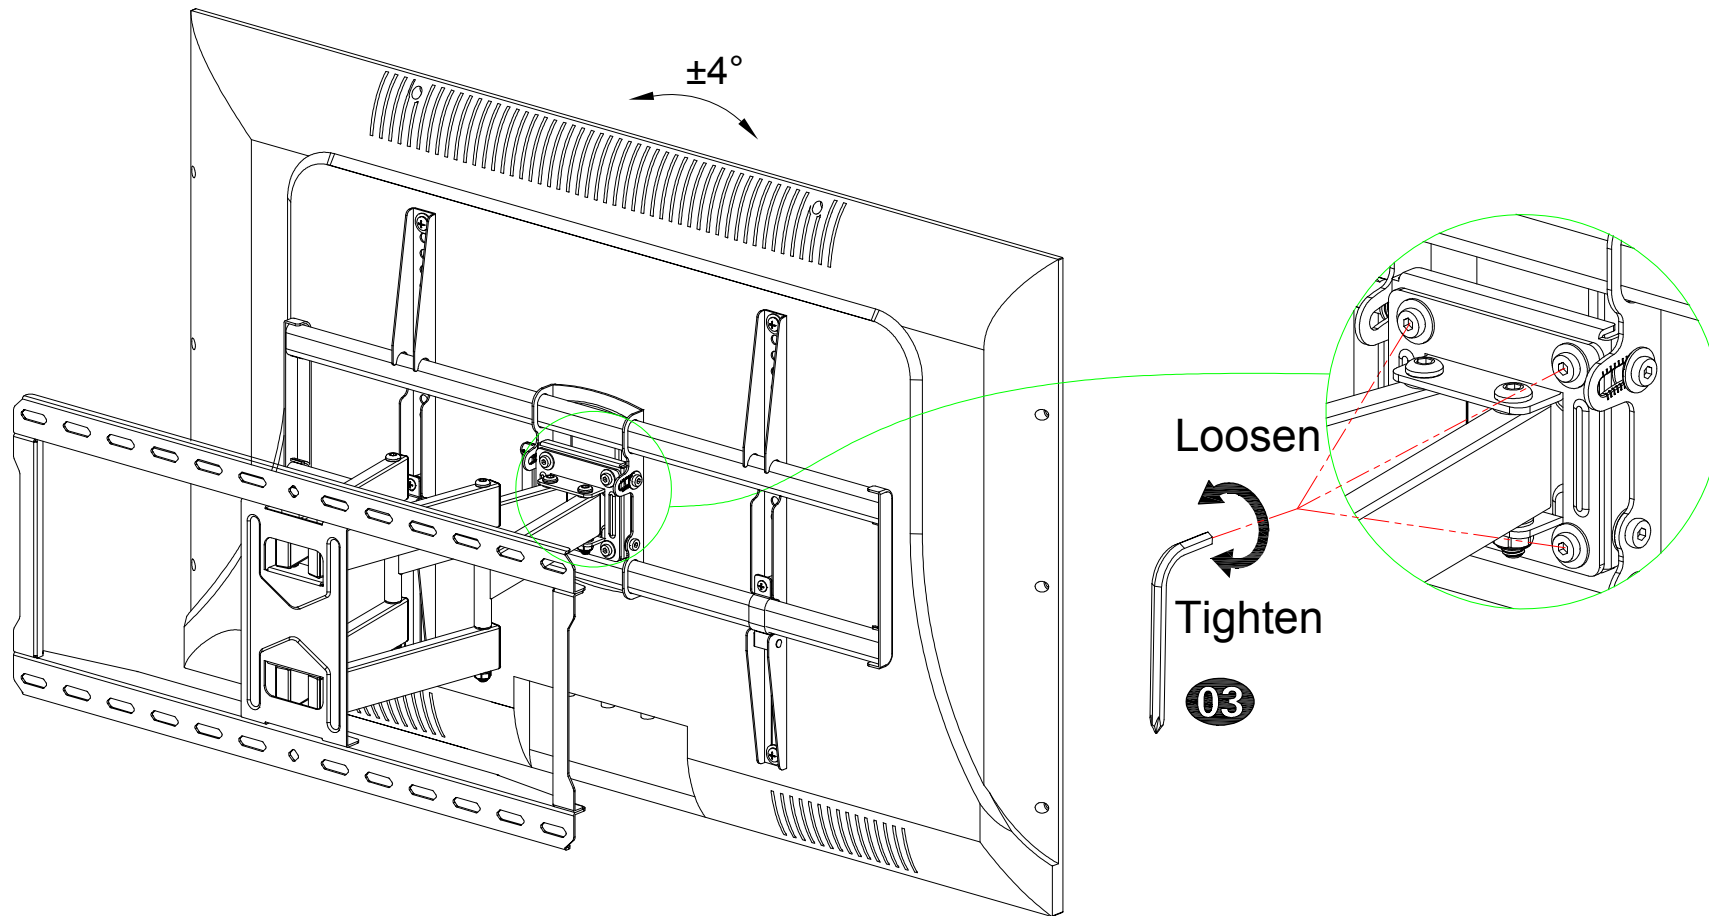

6-2 Tilting angle adjustment (+5°/-15°):

Loosen handle and tilting bolt, adjust TV to your desired position, then tighten handle and tilting bolt. Put the handle level when finish.

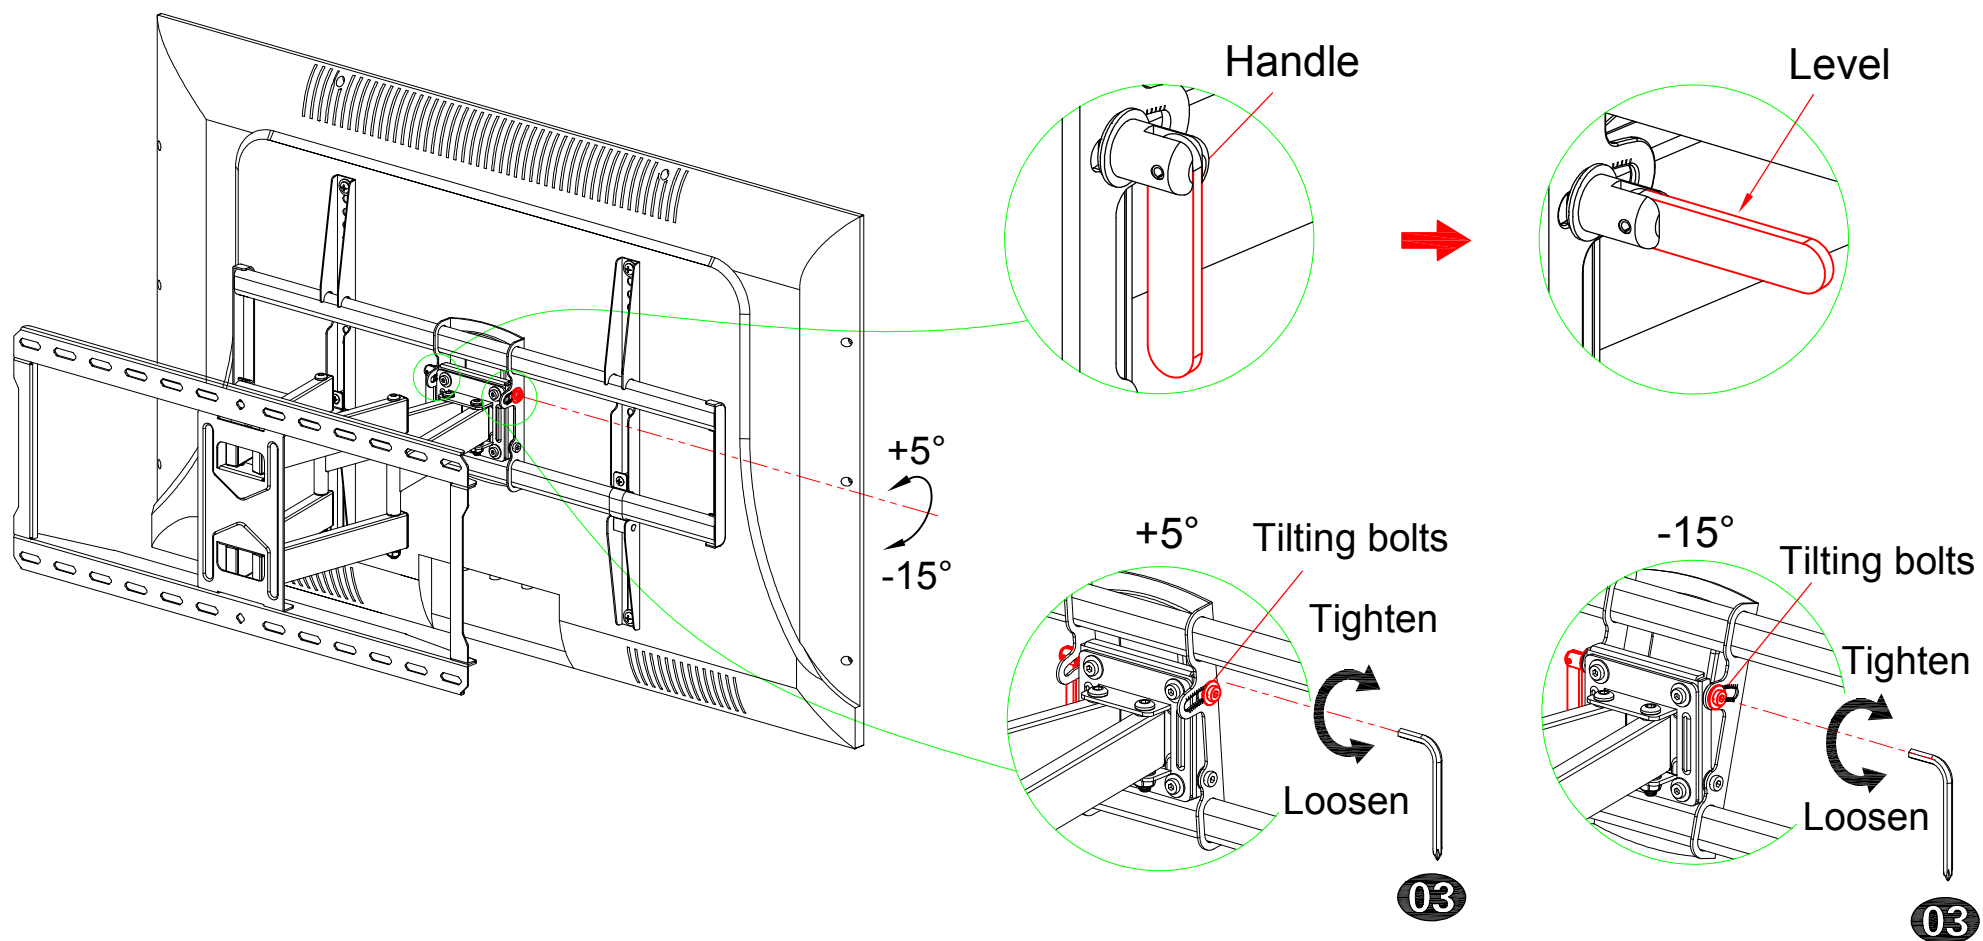

6-3 Cables manage:

Manage TV cables orderly and guide them through the velcros.

